


KM 6375

Induction Cooktop

with PowerFlex cooking area for maximum versatility and performance.

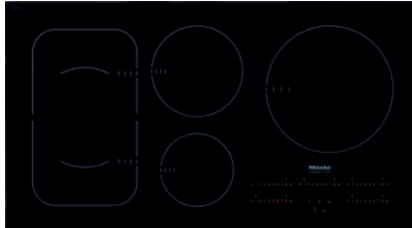

- Quick selection using numerical linear keybanks – Direct control plus
- Modern design – 35 7/8 (911) in (mm) wide for flush-mounted installation
- Versatile and fast – 5 cooking zones incl. 1 PowerFlex area
- Communication with the hood – automatic function Con@ctivity
- Broad performance spectrum – keep warm function and TwinBoost

EAN: 4002515472781 / Material number: 09775920 / Old Material Number: 26637562USA

<b>Heating type</b>	
Fuel type	Induction
<b>Construction type</b>	
Independent of oven	•
<b>Design</b>	
Elegant glass ceramic surface	•
Flush	•
Ceramic surface color	Black
Print design	LightPrint
<b>Ring features</b>	
No. of rings	5
<b>PowerFlex cooking zones</b>	
No.	2
Size in mm	150x230
Max. rating in W	2200
Max. Booster power rating in W	3100
Max. TwinBooster power rating in W	3850
<b>1st cooking zone/cooking area</b>	
Position	Left
Type	PowerFlex bridge
Size in mm	230x390
Max. rating in W	3550
Max. Booster power rating in W	5000
Max. TwinBooster power rating in W	7700
<b>2nd cooking zone/cooking area</b>	
Position	rear center
Type	Variable cooking zone
Size in mm	Ø 140-200
Max. booster rating in W	2600
<b>3rd cooking zone/cooking area</b>	
Position	rear right
Type	Variable cooking zone
Size in mm	Ø 180-280
Max. rating in W	2500
Max. booster rating in W	3100
<b>4th cooking zone/cooking area</b>	
Position	front center
Type	Variable cooking zone
Size in mm	Ø 100-160
Max. rating in W	1450
Max. booster rating in W	1900
<b>Control panel</b>	
Operation via touchpad sensors	Multiple direct dial
Stop & Go function	•
Minute minder	•
Keep-warm function	•
<b>User convenience</b>	
Pan and pan size recognition	•
Display colour	Red
Auto heat-up	•

KM 6375

Induction Cooktop


with PowerFlex cooking area for maximum versatility and performance.



EAN: 4002515472781 / Material number: 09775920 / Old Material Number: 26637562USA


Safety switch-off	•
<b>Cleaning convenience</b>	
Easy to clean ceramic glass	•
<b>Safety</b>	
Safety cut-out	•
Lock function	•
System lock	•
Overheating protection	•
Residual heat indicator	•
<b>Technical data</b>	
Dimensions (width) in in. (mm)	35 7/8 (911)
Dimensions (height) in in. (mm)	4 7/8 (121)
Built-in height with mains connection box in in. (mm)	5 1/8 (128)
Depth in in. (mm)	20 1/4 (512)
Internal cutout dimensions in mm (depth) with flush installation	490
Weight in lbs. (kg)	59 (27)
External cutout dimensions in mm (width) with flush installation	915
External cutout dimensions in mm (depth) with flush installation	516
Total connected load in kW	11.50
Internal cutout dimensions width in in. (mm) with flush installation	889
Power cord length in in. (m)	3 (1.2)
Voltage in V	240
Frequency in Hz	60
<b>Accessories supplied</b>	
Number of mains cables with plug	Yes

KM 6375  
 Induction Cooktop  
 with PowerFlex cooking area for maximum versatility and performance.

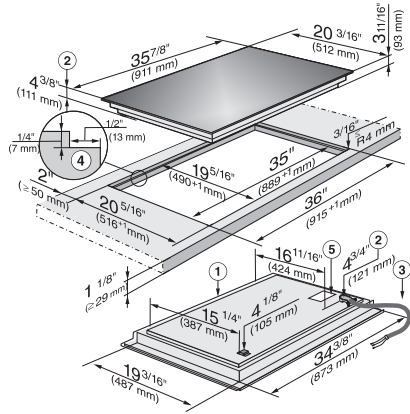


KM 6375 (Installation drawing)

1) Front, 2) Casing depth, 3) Flexible metal Extension hose L = 47 1/4" (1200 mm), 4) Stepped cut-out, 5) Data plate

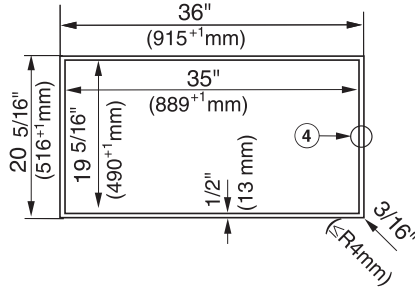


KM 6375 (Installation drawing)

4) Wooden frame 1/2" / 13 mm (not supplied with appliance)

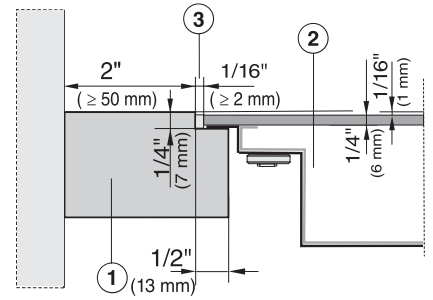

KM 6375 (Installation drawing)

1) Worktop, 2) Hob, 3) Width of gap

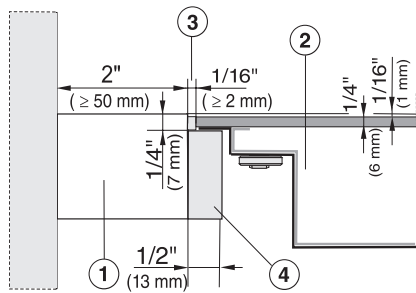

KM 6375 (Installation drawing)

1) Worktop, 2) Cooktop, 3) Gap, 4) Wooden frame 1/2" / 13 mm (supplied loose)