

Special Notes: LED lights. This model is not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers are available in standard and custom sizes. Galley rail included.


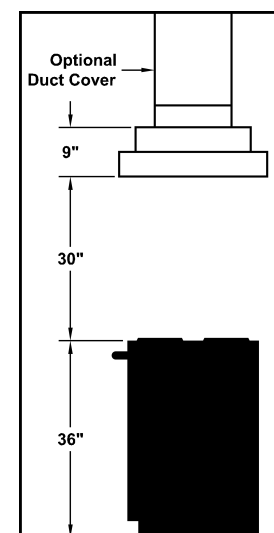
[illegible]

Diagram illustrating the required clearances for a hood penetration through a roof:

- Centerline of Hood**: Indicated by a vertical dashed line.
- Centerline of Hood**: Indicated by a horizontal dashed line.
- 5" x 16" Exhaust Opening**: The rectangular opening in the roof.
- 3/4"**: Clearance from the centerline of the hood to the side of the exhaust opening.
- 2 1/8"**: Clearance from the centerline of the hood to the side of the exhaust opening.
- 8" Transition Opening 9" Above Top of Hood**: The opening in the roof structure above the hood.
- Electrical**: Indicated by a line pointing to the transition opening.
- Vent Holes**: Indicated by a line pointing to the transition opening.

REC. MOUNTING HEIGHT*

* Exceeding recommended mounting height may compromise performance.

MODEL	VOLTS	AMPS+	HZ	RPM	CFM SP@0.0"	EQUIV CFM\$	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	MIN. ROUND DUCT SIZE	SONES#
T200 Island Dual	115	4.0	60	1550	550	900	507	471	431	8" (50 sq. in.)	6.0

\$ Because the Magic Lung blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung with other blower units made by other manufacturers, use the "Equivalent CFM".

Specifications Subject To Change Without Notice

