

DA 399-7 Classic

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



- Design – 35 3/8 (898) in (mm) wide trapezoidal canopy
- Powerful – ?? in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- For perfect functionality – accessories for proper venting

EAN: 4002515802199 / Material number: 10558800 / Old Material Number: 28399750USA

| Design | |
|--|----------------------------|
| Wall ventilation hood | • |
| Construction type and design | |
| Color | Stainless steel |
| Operating modes | |
| Recirculated mode | Can be retrofitted |
| Recirculation conversion kit (order separately) | DUW 20 |
| OdorFree charcoal filter (order separately) | DKF 12-P |
| User convenience | |
| Electronic controls | • |
| Power levels (number excl. Intensive) | 3 |
| Programmable Intensive switch-off | • |
| CleanCover | • |
| Filter system | |
| Number of dishwasher-safe stainless-steel grease filters | 3 |
| Lighting | |
| LED | • |
| Number x W | 2 x 3 W |
| Light intensity in Lx | 300 lx |
| Color temperature in K | 3000 Kelvin |
| Blower | |
| Dual-action blower | • |
| AC motor | • |
| Exhaust air | |
| Air throughput | Values upon request |
| Safety | |
| Safety shut-off | • |
| Technical data | |
| Overall hood height for vented mode and external in inches (mm) | 27 3/8 (695)–40 (1015) |
| Overall hood height for recirculation and external in inches (mm) | 32 1/2 (825)–45 1/8 (1145) |
| Overall min. height for vented and external in in. (mm) | 27 3/8 (695) |
| Canopy width in in.(mm) | 35 3/8 (898) |
| Overall max. height for vented and external in in. (mm) | 40 (1015) |
| Canopy height in in.(mm) | 4 3/4 (120) |
| Overall min. height for recirculation in in. (mm) | 32 1/2 (825) |
| Canopy depth in in.(mm) | 20 1/2 (520) |
| Overall max. height for recirculation in in. (mm) | 45 1/8 (1145) |
| Minimum height above electric hobs in mm | 24 1/8 (610) |
| Net weight in lbs. (kg) | 58 (26.0) |
| Length of electrical wire in ft (m) | 4 (1.5) |
| Standard plug fitted | • |
| Minimum height above gas cooktop (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm | 26 (660) |
| Total connected load in kW | 0.35 |
| Voltage in V | 120 |
| Fuse rating in A | 15 |
| Number of phases | 1 |
| Frequency in Hz | 60 |

DA 399-7 Classic

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



EAN: 4002515802199 / Material number: 10558800 / Old Material Number: 28399750USA

Installation note

Vent connection at top

•

Vent connection at top and rear

•

Diameter of vent connection in in.(mm)

6 (150)

Telescopic chimney

•

Standard accessories

Non-return flap

•

Optional accessories

OdorFree charcoal filter

Nein


OdorFree charcoal filter, can be reactivated

DKF 12-R

DA 399-7 Classic

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.

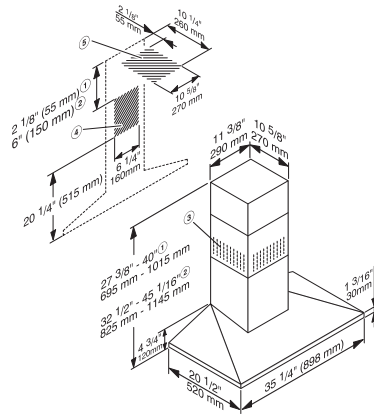

DA 399-6 (Installation drawing) – USA

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)