

DA 6596 W Puristic Canto

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



- Timeless design – stainless steel canopy 35 3/8 (898) in (mm) wide
- Unique convenience – Con@ctivity 2.0
- Powerful – ?? in Booster level
- Efficient and beautiful – Multi-zone edge extraction
- Variable: edge vented panels made of glass or stainless steel

EAN: 4002515523971 / Material number: 09762220 / Old Material Number: 28659650USA

Design	
Wall ventilation hood	•
Construction type and design	
Color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUW 20
OdorFree charcoal filter (order separately)	DKF 12-900
Decor elements in glass (order separately)	DRP 6590W
Design	
Multi-zone edge extraction	•
User convenience	
Automatic function	Con@ctivity 2.0
Electronic controls	•
Power levels (number excl. Intensive)	3
Programmable Intensive switch-off	•
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Programmable grease filter saturation indicator	•
Programmable charcoal filter saturation indicator	•
Acoustic package	•
CleanCover	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	3
Lighting	
LED	•
Number x W	3 x 3 W
Light intensity in Lx	460 lx
Color temperature in K	3500 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Exhaust air	
Air throughput	Values upon request
Safety	
Safety shut-off	•
Technical data	
Overall hood height for vented mode and external in inches (mm)	27 3/8 (693)–39 7/8 (1010)
Overall hood height for recirculation and external in inches (mm)	32 3/8 (820)–45 (1143)
Overall min. height for vented and external in in. (mm)	27 3/8 (693)
Canopy width in in.(mm)	35 3/8 (898)
Overall max. height for vented and external in in. (mm)	39 7/8 (1010)
Canopy height in in.(mm)	2 7/8 (70)
Overall min. height for recirculation in in. (mm)	32 3/8 (820)
Canopy depth in in.(mm)	19 3/4 (500)
Overall max. height for recirculation in in. (mm)	45 (1143)
Minimum height above electric hobs in mm	24 1/8 (610)
Net weight in lbs. (kg)	56 (25.0)

DA 6596 W Puristic Canto

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.




EAN: 4002515523971 / Material number: 09762220 / Old Material Number: 28659650USA

Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Minimum height above gas cooktop (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation note	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
Standard accessories	
Reducer from 150 to 125 mm Ø	•
Communication module for Con@ctivity XKM 2000 DA	XKS 3000 Z
Non-return flap	•
Optional accessories	
OdorFree charcoal filter	DKF 12-900

DA 6596 W Puristic Canto

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.

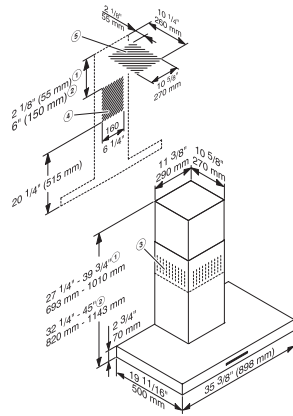

DA 6596 W (Installation drawing) – USA

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)