

DLE3470W / DLG3471W

7.4 cu. ft. Front Load Dryer

- 7.4 cu. ft. Ultra Large Capacity
- Sensor Dry
- FlowSense® Duct Clogging & Lint Filter Indicators
- ENERGY STAR® Certified
- Closet Depth
- Aluminized Alloy Steel Drum
- LoDecibel® Quiet Operation
- Smart Diagnosis
- Wrinkle Care Option



AVAILABLE COLORS

WHITE




SUMMARY		FABRIC CARE FEATURES		POWER SOURCE	
Type	Front Load Dryer	Sensor Dry	Yes	Ratings	CSA Listed
Vent Type	Vented	Precise Temperature Control with Variable Heater	Yes	Electrical Requirements	Elec: 120/240V, 60Hz, 26A Gas: 120V, 60Hz, 11.5A
Dryer Type	Elec: DLE3470W Gas: DLG3471W	CONVENIENCE FEATURES		Type	Electric, Gas
Capacity	7.4 cu. ft.	3 Minute Installation Check	Yes	BTU Rating	Gas: 20,000
Matching Washer	WM3470CW	End of Cycle Signal	Yes	OPTIONS	
Sensor Dry	Yes	Reversible Door	Yes	LP Conversion Kit	383EEL3002D
Color	White (W)	FlowSense® Duct Clogging Indicator	Yes	Side Venting Kit	3911EZ9131X
APPEARANCE		Wrinkle Care Option	Yes	Drying Rack	3750EL1001D
Hard Buttons	Yes	Control Lock	Yes	Pedestal	WDP6W
Touch Buttons	Yes	Venting Option	Electric: 4 Way Venting / Gas: 3 Way Venting	Pedestal (WxHxD)	27" x 13 5/8" x 28" (43 7/8" D with door open)
Dial-A-Cycle®	Yes	4 Adjustable Legs	Yes	DIMENSIONS	
DRYER PROGRAMS		Remaining Time Display / Status Indicator(s)	Yes	Product (WxHxD)	27" x 39" x 30 1/8"
No. of Programs	8	ThinQ® TECHNOLOGY		Depth with Door Open	51 3/8"
Programs (Sensor Dry)	Normal, Heavy Duty, Bedding, Towels, Perm. Press, Delicates, Speed Dry (Manual Dry), Air Dry (Manual Dry)	Smart Diagnosis	Yes	Carton (WxHxD)	28 7/8" x 43 1/8" x 31 3/8"
No. of Options	7	ENERGY		Product Weight (lbs.)	Electric: 117.3 lbs. / Gas: 120.2 lbs.
Options	More Time, Less Time, Damp Dry Signal, Wrinkle Care, Control Lock, Energy Saver, Signal	ENERGY STAR® Certified	Yes	Carton Weight (lbs.)	Electric: 122.4 lbs. / Gas: 124.9 lbs.
Temperature Settings	High, Medium, Low	CEF	Electric: 3.94 / Gas: 3.49	LIMITED WARRANTY	
Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry	MATERIALS AND FINISHES		Parts & Labor	1 Year
Manual Dry Times	60 min., 40 min., 20 min., More Time/Less Time	Aluminized Alloy Steel Drum	Yes	Drum	3 Years
		Drum Rear	Painted	UPC CODES	
		Cabinet	Painted Steel	DLE3470W (White)	195174048917
		Door	Round White Trim	DLG3471W (White)	195174049976
		All Available Colors	White (W)		

Dimensions and Clearances

The following clearances are recommended for the appliance.

- Additional clearances should be considered for ease of installation and servicing.
- Additional clearances should be considered on all sides of the dryer to reduce noise transfer.

Installation Spacing for Recessed Area or Closet Installation

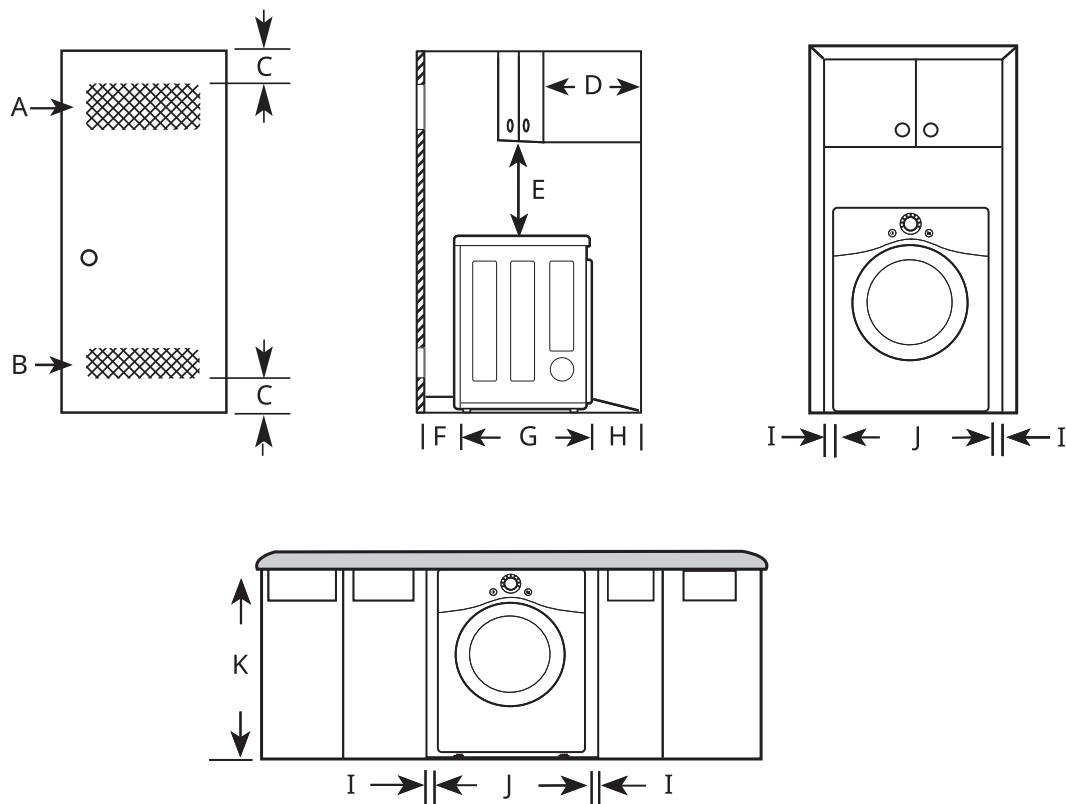

-	Description	Dimension/Clearance
A	Upper Ventilation Opening	≥ 48 sq. in. (310 cm ²)
B	Lower Ventilation Opening	≥ 24 sq. in. (155 cm ²)
C	Distance to Ventilation Opening	≥ 3" (76 mm)
D	Overhead Cabinet Depth	≤ 14" (356 mm)
E	Distance to the Overhead Cabinet/Shelf	≥ 18" (457 mm)
F	Front Clearance	1" (25 mm)
G	Depth	30 1/8" (765 mm)
H	Back Clearance	≥ 5" (127 mm)
I	Side Clearance	≥ 1" (25 mm)
J	Width	27" (686 mm)
K	Height of Cabinet Opening	39" (990 mm)


Closet Ventilation Requirements

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm²) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm²) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

NOTE

- There should be at least a little space around the dryer (or any other appliance) to eliminate the transfer of vibration from one appliance to another. If there is enough vibration, it could cause appliances to make noise or come into contact, causing paint damage and further increasing noise.
- No other fuel-burning appliance can be installed in the same closet as a dryer.


Installation Spacing for Recessed Area or Closet, with Stacked Washer and Dryer

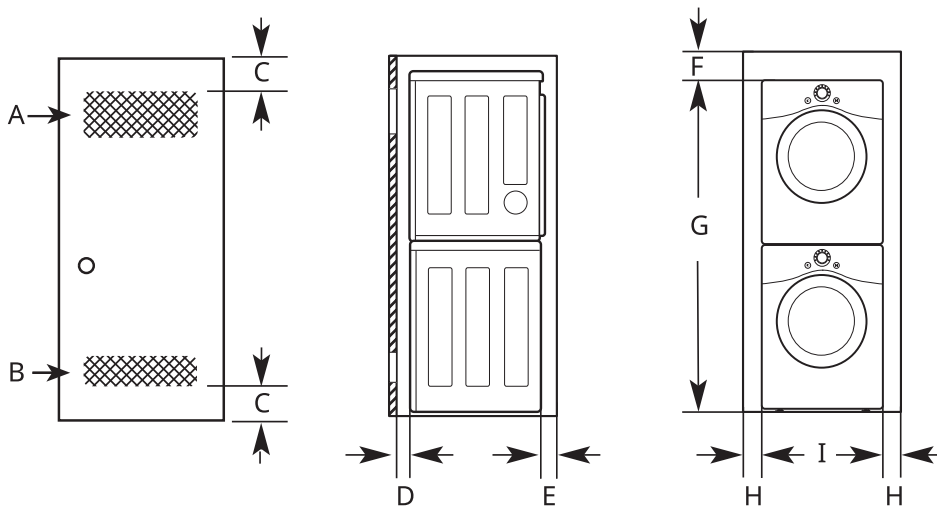

-	Description	Dimension/Clearance
A	Upper Ventilation Opening	≥ 48 sq. in. (310 cm ²)
B	Lower Ventilation Opening	≥ 24 sq. in. (155 cm ²)
C	Distance to Ventilation Opening	≥ 3" (76 mm)
D	Front Clearance	≥ 1" (25 mm)
E	Back Clearance	≥ 5 1/2" (140 mm)
F	Top Clearance to the Ceiling	≥ 6" (152 mm)
G	Height to the Top of Stacked Appliances [†]	77 1/2" (1968 mm)
H	Side Clearance	≥ 1" (25 mm)
I	Width [†]	27" (686 mm)

[†] Differs depending on the washer dimensions.



Installation Spacing for Cabinet

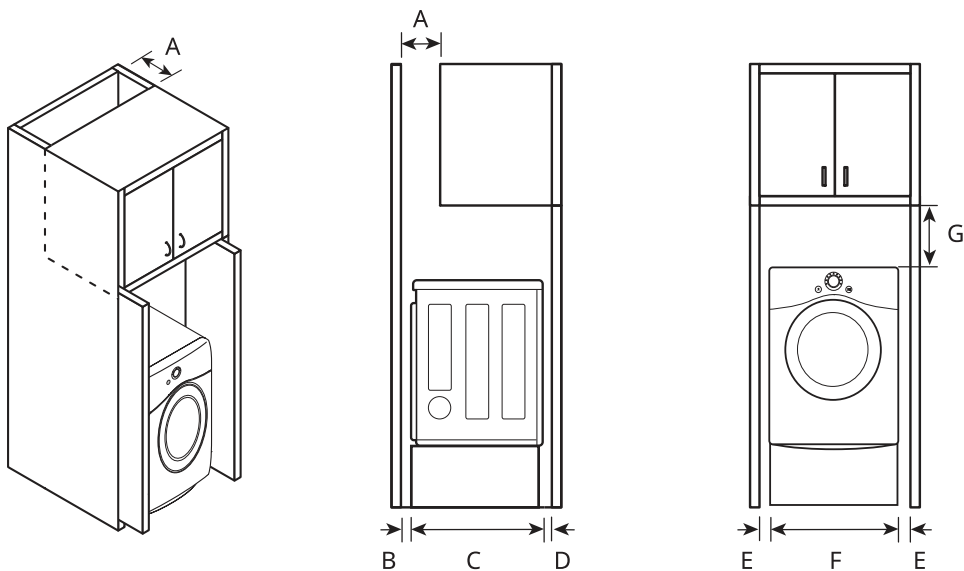

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

-	Description	Dimension/Clearance
A	Depth of Ventilation Opening	≥ 7" (178 mm)
B	Back Clearance	≥ 5" (127 mm)
C	Depth	30 1/8" (765 mm)
D	Front Clearance	≥ 1" (25mm)
E	Side Clearance	≥ 1" (25 mm)
F	Width	27" (686 mm)
G	Clearance to Top of Cabinet	≥ 9" (229 mm)

Ductwork

Wall Cap Type	No. of 90° Elbows	Maximum length of 4-inch diameter rigid metal duct
 a: 4" (10.2 cm)	0	65 ft. (19.8 m)
	1	55 ft. (16.8 m)
	2	47 ft. (14.3 m)
	3	36 ft. (11.0 m)
	4	28 ft. (8.5 m)
Use for only short run installations  b: 2.5" (6.35 cm)	0	55 ft. (16.8 m)
	1	47 ft. (14.3 m)
	2	41 ft. (12.5 m)
	3	30 ft. (9.1 m)
	4	22 ft. (6.7 m)

NOTE

- Deduct 6 ft. (1.8 m) for each additional elbow. Do not use more than four 90° elbows.
- In Canada, only those foil-type flexible ducts, if any, specifically identified for use with the appliance by the manufacturer should be used. In the United States, only those foil-type flexible ducts, if any, specifically identified for use with the appliance by the manufacturer and that comply with the Outline for Clothes Dryer Transition Duct, Subject 2158A, should be used.


Routing and Connecting Ductwork

Follow the guidelines below to maximize drying performance and reduce lint buildup and condensation in the ductwork. Ductwork and fittings are NOT included and must be purchased separately.


- Use 4-inch (10.2 cm) diameter rigid, semi-rigid or flexible metal ductwork.
- The exhaust duct run should be as short as possible.
- Use as few elbow joints as possible.
- The male end of each section of exhaust duct must point away from the dryer.
- Use duct tape on all duct joints.
- Insulate ductwork that runs through unheated areas in order to reduce condensation and lint buildup on duct surfaces.

- Incorrect or inadequate exhaust systems are not covered by the dryer warranty. Dryer failures or service required because of such exhaust systems will not be covered by the dryer warranty.

Correct Venting



Incorrect Venting



Connecting Gas Dryers

⚠ WARNING

- To reduce the risk of fire or explosion, electric shock, property damage, injury to persons, or death when using this appliance, follow requirements including the following:

Electrical Requirements for Gas Models

⚠ WARNING

- This dryer is equipped with a three-prong grounding plug for protection against shock hazard which should be plugged directly into a properly grounded three-prong receptacle. Do not cut or remove the grounding prong from this plug.
- Do not, under any circumstances, cut or remove the third (ground) prong from the power cord.
- For personal safety, this dryer must be properly grounded.