

# FISHER & PAYKEL

## PRELIMINARY SPECIFICATION GUIDE

## INTEGRATED DISHWASHER, 24", TALL, SANITIZE



### OVERVIEW

This panel ready, built-in dishwasher is designed to provide seamless integration into your kitchen design. Flexible storage allows for easy stacking, whilst the combination of clever technologies means a reliable wash performance, for perfect results.

### MODELS

Integrated Dishwasher, 24", Tall, Sanitize

DW24UT4I2

### SERIES & STYLE

Series 7

Integrated

### FEATURES

- ① Can be installed under counter heights between 33 3/4" to 36 1/8", fitting flush with cabinetry for a seamless look
- ② Tall height offers a generous 25" of usable space and easily accommodates plate sizes up to 13"
- ③ Eight wash programs including specialty Auto, Eco, 60 Min and Glassware cycles
- ④ Extra Dry, Sanitize, Half Load and Intensive wash modifiers provide extra wash options
- ⑤ Fan-assisted drying with end-of-cycle auto-door-open removes excess moisture, and leaves your dishes with a dry finish
- ⑥ Fully flexible racking including adjustable middle basket and cup racks, foldable wine racks, full-width utensil tray and cutlery basket
- ⑦ With touch controls, floor-light cycle status indicator and interior LED lighting
- ⑧ Wi-Fi capability and a SmarthQ™ app connectivity for remote control and notifications
- ⑨ With Energy Star 'most efficient' rating\*
- ⑩ Quiet wash performance, running at a low decibel rating of 42dBA\*\*

\*Subject to change. Final certification pending.

\*\* Noise subject to change.

# FISHER & PAYKEL


## PRELIMINARY SPECIFICATION GUIDE

## INTEGRATED DISHWASHER, 24", TALL, SANITIZE

### PRODUCT SPECIFICATIONS

<b>Model No.</b>	DW24UT4I2
<b>Dimensions</b>	H 33 3/4 - 36 1/8" (857 - 917mm) W 23 1/2" (597mm) D 22 5/8" (554mm)
<b>Electrical</b>	
<b>Supply</b>	120V, 60Hz
<b>Service</b>	10A
<b>Plumbing</b>	
<b>Supply</b>	3/4" BSP Male Fitting
<b>Pressure</b>	Min 5 psi (34.5 Kpa), max 150 psi (1034 Kpa) Hot water connection @ max 140°F (20°C)


### PLUMBING AND ELECTRICAL

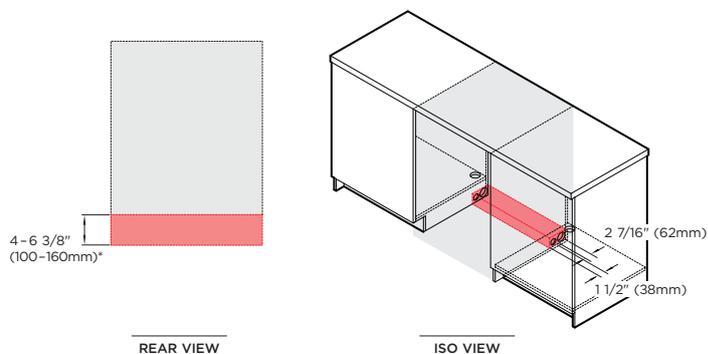


Service outlet at rear extends both sides, hoses and cords can be routed to either or both sides.

\*Depending on adjustment of levelling feet.

### PRODUCT DIMENSIONS

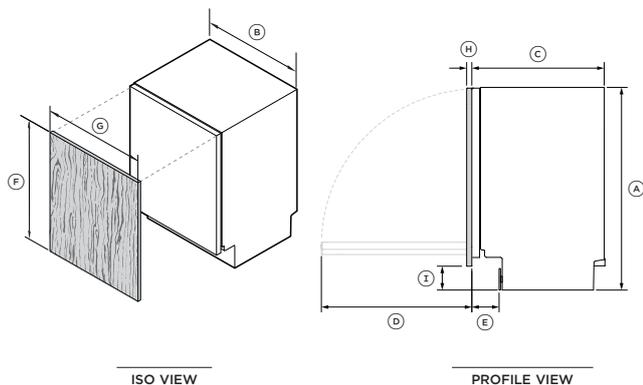

### CAVITY DIMENSIONS: STANDARD INSTALLATION

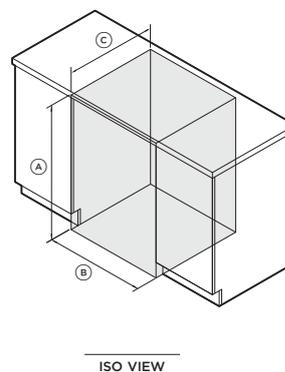

	in	mm
Ⓐ Overall height*	33 3/4 - 36 1/8	857 - 917
Ⓑ Overall width**	23 1/2	597
Ⓒ Overall depth	21 13/16	554
Ⓓ Minimum depth of open door	26 1/2	673
Ⓔ Depth of toe kick recess	4 9/16	116
Ⓕ Minimum height of custom door panel	28 1/8	714
Ⓖ Minimum width of custom door panel	23 7/16	595
Ⓗ Depth of custom door panel	5/8 - 1	16 - 25
Ⓘ Height from floor to door panel base	2 3/4 - 7 7/8	70 - 200

	in	mm
Ⓐ Minimum overall height*	33 3/4	857
Ⓑ Minimum overall width	23 5/8	600
Ⓒ Minimum overall depth**	22 13/16	580

\*Depending on adjustment of levelling feet

\*\*Includes front panels

\*Depending on adjustment of levelling feet

\*\*Excluding side seals

Custom panel/toe kick panel thickness not included in these dimensions