

# ELICA PRO SERIES AREZZO





Arezzo provides professional grade performance, while being discreetly mounted inside the cabinetry. Available in 28  $\frac{1}{2}$ " and 34 $\frac{1}{2}$ " width with a 600 CFM blower, and equipped with a 1200 CFM blower for widths of 34  $\frac{1}{2}$ ", 40  $\frac{1}{2}$ " and 46  $\frac{1}{2}$ " for extraordinary ventilating power. The extra depth (22") is ideal for supporting powerful professional ranges. Plus the All-In-One design avoids the need to purchase a stainless liner. Hidden metallic in/out knob controls operate the 4-speed blower and LED lighting.

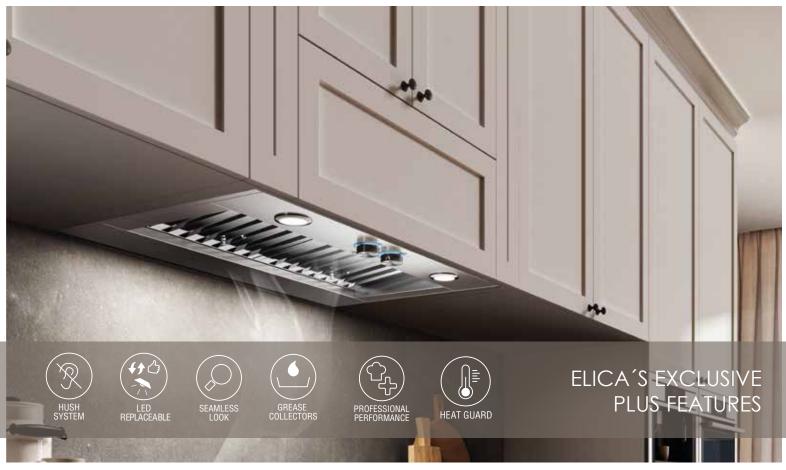



		EAR634SS			
	EAR628S4	EAR134S4	EAR140S4	EAR146S4	
Α	28½" (72.4 cm)	34½" (87.6 cm)	40½" (103 cm)	46½" (118 cm)	
В	22" (55.9 cm)	22'' (55.9 cm)	22" (55.9 cm)		
С	5 <sup>7</sup> /16" (13.8 cm)				
D	6 1/2" (16.4 cm)				
Е	22¾"(56 cm) 27 ¼ "(70 cm)				
F	12 %" (31.6 cm)				
G	24 <sup>2</sup> / <sub>64</sub> "(62 cm) 29 <sup>13</sup> / <sub>16</sub> " (31.6 cm)				
Н	101/8" (25.7 cm)				
I	10" (25.4 cm)				
J	<sup>3</sup> / <sub>4</sub> " (1.9 cm)				
K	11 <sup>7</sup> /8" (30.4 cm)				

## ELICA PRO SERIES

## **AREZZO**



#### **SPECIFICATIONS**

Width:	28" Unit	34" Unit	40" Unit	46" Unit	
Model:	EAR628S4	EAR634SS* (600 CFM) EAR134S4** (1200 CFM)	EAR140S4	EAR146S4	
Dimensions:	28 1/2"W x 22"D x 11 7/8"H	34 1/2"W x 22"D x 11 7/8"H	40 1/2"W x 22"D x 11 7/8"H	46 1/2"W x 22"D x 11 7/8"H	
Blower Type(internal):**	600 CFM(4-speed)	600 CFM (4-speed)* 1200 CFM (4-speed)**	1200 CFM(4-speed)	1200 CFM(4-speed)	
Noise (sones):	7 Sones	7 Sones** 8.5 Sones**	8.5 Sones		
Finish: Controls:	Stainless Steel Fully Retractable Rotating Knobs with Blue Blacklight				
Illumination:	2 LED, 6.5 W, 30	00 K, 540 Lumen	4 LED, 6.5 W, 3000 K, 540 Lumen		
Grease Filter:	Dishwasher-Safe, Professional Stainless Steel Baffle 2 for 28", 34", 40" & 3 for 46"				
Duct Transition: Installation Type:	10" Round with BackDraft Damper (top only)  Ducted Installation Only				
Electrical:	120V - 60 Hz, 463 W	120V - 60 Hz, 490 W* 120V - 60 Hz, 913 W**	120V - 6	0 Hz, 926 W	
KITS: 1200 CFM External Blower Kit:	KIT0153054				
1200 CFM Inline Blower Kit:	KIT0154387				
Inline Blower Shell Kit:	KIT0179549 (for use with 1200 CFM blowers only)				
External Blower Shell Kit:	KIT0179547 (for use with 1200 CFM blowers only)				
Electronic CFM Reduction Bypass KIT:	KIT0185752 (for 600 CFM Blower), KIT0185099 (for 1200 CFM Blower)				
WARRANTY:***	Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com.				

### PLUS FEATURES



HUSH SYSTEM - An exclusive sound deadening technology that effectively reduces sound levels by over 35%



LED CONSUMER REPLACEABLE BULB - High quality LED lighting usually requires a skilled technician to replace lamps. Avoid this expense with Elica's new LED lamps that enable homeowners to replace in seconds



SEAMLESS CRAFTSMANSHIP - Heavy gauge stainless steel "Seamless" construction that delivers refined elegance.



STAINLESS STEEL BAFFLE FILTERS WITH GREASE COLLECTORS - Designed for high airflow cooking, the "S" shape design traps high volumes of grease



PROFESSIONAL PERFORMANCE - Special features and high performances for models with aspiration capacity between 600 and 1200 CFM's



HEAT GUARD - Senses extreme temperatures (>316° F degrees) and automatically adjusts the blower speed to HIGH

Width	HVI Certified Ratings	High Speed	Working Speed	Duct Size
28'' 34''*	CFM Sones	500 9.5	180 2	10" (Vertical) 10" (Vertical)
34''** 40'' 46''	CFM Sones	860 12.5	320 2	10" (Vertical) 10" (Vertical)

- $^{\ast}$  The product images shown are for illustration purposes only and may not be an exact representation of the product.
- \*\* Blower performance indicates the performance of the blower by itself. Performance claims are not HVI certified but were established in accordance with HVI Standardized test procedure. For Certified Ratings, please refer to HVI Certified Product Directory. Electric Ratings are declared according to UL.
- \*\*\* For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.