




- HUSH SYSTEM
- LED REPLACEABLE
- SEAMLESS LOOK
- GREASE COLLECTORS
- PROFESSIONAL PERFORMANCE
- HEAT GUARD

ELICA'S EXCLUSIVE PLUS FEATURES

For homeowners who are passionate about the culinary arts, the seamless welded corner craftsmanship, traditional styling and gleaming stainless steel of Calabria, provides the look and performance expected from a professional-grade range hood. With the new backlit hidden knob controls and traditional baffle filters, Calabria is available in 30", 36", 42" and 48" widths and equipped with a 600 CFM (30" and 36") or 1200 CFM blower (36", 42", 48") to support all cooking needs. Designed for standard ducted ventilation only.

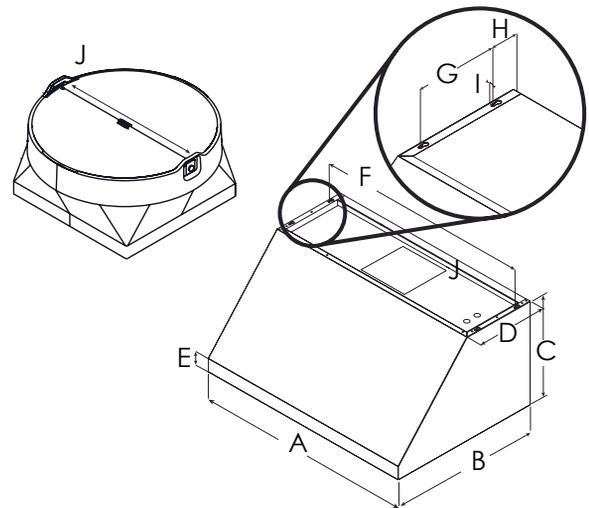

- ≥24"
- ≥30"

MOUNTING HEIGHT RANGE

| | ECL630S4 | ECL636SS ECL136S4 | ECL142S4 | ECL148S4 |
|---|---|--|---|---|
| A | 30" (76 cm) | 36" (91.1 cm) | 42" (106.5 cm) | 48" (121.7 cm) |
| B | 25" (63.5 cm) | | | |
| C | 18" (45.7 cm) | | | |
| D | 12" (30.3 cm) | | | |
| E | 1 ⁵ / ₈ " (5.7 cm) | | | |
| F | 29 ¹ / ₈ " (74 cm) | 35 ¹ / ₈ " (89.2 cm) | 41 ¹ / ₈ " (104.5 cm) | 47 ¹ / ₈ " (119.7 cm) |
| G | 7 ¹ / ₂ " (19 cm) | | | |
| H | 2 ⁹ / ₁₆ " (6.5 cm) | | | |
| I | 3 ³ / ₈ " (1 cm) | | | |
| J | 10" (25.45 cm) | | | |

SPECIFICATIONS



| Width: | 30" UNIT | 36" UNIT | 42" UNIT | 48" UNIT |
|---------------------------------|--|---|---------------------|---------------------|
| Model: | ECL630S4 | ECL636SS* ECL136S4** | ECL142S4 | ECL148S4 |
| Dimensions: | 30"W x 25"D x 18"H | 36"W x 25"D x 18"H | 42"W x 25"D x 18"H | 48"W x 25"D x 18"H |
| Blower Type(internal):** | 600 CFM (4-speed) | 600 CFM* / 1200 CFM** | 1200 CFM (4-speed) | 1200 CFM (4-speed) |
| Noise (sones):** | 7 Sones | 7 Sones * 8.5 Sones** | 8.5 Sones | |
| Finish: | Stainless Steel | | | |
| Controls: | Fully Retractable Rotating Knobs with Blue Backlight | | | |
| Illumination: | LED Lights, 6.5 W, 3000 K, 540 Lumen/Lamp 2 LED for 30", 36" 42" & 4 LED for 48" | | | |
| Grease Filter: | Dishwasher-Safe, Professional Stainless Steel Baffle 2 for 30", 36" 42" & 3 for 48" | | | |
| Duct Transition: | 10" Round with BackDraft Damper (top and rear) | | | |
| Installation Type: | Ducted Installation Only | | | |
| Electrical: | 120V - 60 Hz, 463 W | 120V - 60 Hz, 490 W * 120V - 60 Hz, 913 W ** | 120V - 60 Hz, 913 W | 120V - 60 Hz, 926 W |
| KITS: | | | | |
| Long Chimney Extension Kit 6": | KIT02159 | KIT02158 | KIT02622 | KIT02164 |
| Long Chimney Extension Kit 12": | KIT02160 | KIT02161 | KIT02623 | KIT02165 |
| Heat Lamp Kit: | KIT0155106 | KIT0155107 | KIT0155110 | KIT0155111 |
| Stainless Back Splash: | KIT0142864 | KIT0142867 | KIT0142868 | KIT0142870 |
| External Blower Kit (1200 CFM): | KIT0153054 | | | |
| In-line Blower Kit (1200 CFM): | KIT0154387 | | | |
| WARRANTY:*** | Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com. | | | |

PLUS FEATURES



HUSH SYSTEM - An exclusive sound deadening technology that effectively reduces sound levels by over 35%.



LED CONSUMER REPLACEABLE BULB - High quality LED lighting usually requires a skilled technician to replace lamps. Avoid this expense with Elica's new LED lamps that enable homeowners to replace in seconds.



SEAMLESS CRAFTSMANSHIP - Heavy gauge stainless steel "Seamless" construction that delivers refined elegance.



STAINLESS STEEL BAFFLE FILTERS WITH GREASE COLLECTORS - Designed for high airflow cooking, the "S" shape design traps high volumes of grease.



PROFESSIONAL PERFORMANCE - Special features and high performances for models with aspiration capacity between 600 and 1200 CFM's.



HEAT GUARD - Senses extreme temperatures (316°F degrees) and automatically adjusts the blower speed to HIGH.

| Width | HVI Certified Ratings | High Speed | Working Speed | Duct Size |
|-------------------|-----------------------|-------------|---------------|--------------|
| 30" 36" | CFM Sones | 490 8.5 | 180 1.5 | 10" Vertical |
| 36" 42" 48" | CFM Sones | 910 12.5 | 340 2 | 10" Vertical |

* The product images shown are for illustration purposes only and may not be an exact representation of the product.

** Blower performance indicates the performance of the blower by itself. Performance claims are not HVI certified but were established in accordance with HVI Standardized test procedure. For Certified Ratings, please refer to HVI Certified Product Directory. Electric Ratings are declared according to UL.

*** For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.