



HUSH SYSTEM



SEAMLESS LOOK



GREASE COLLECTORS



PROFESSIONAL PERFORMANCE





HEAT GUARD

ELICA'S EXCLUSIVE PLUS FEATURES

Scanno available in 28", 34" & 46" width and only 15 5/8" depth to support shallower cabinetry, and offers 4 speed, 600 and 1200 CFM blowers for extraordinary ventilating power.

The All-In-One design avoids the need to purchase a stainless steel liner. Scanno comes equipped with ergonomic rotating knob controls which discreetly recess out of sight when not in use and long life LED lighting illuminates the cooking surface.

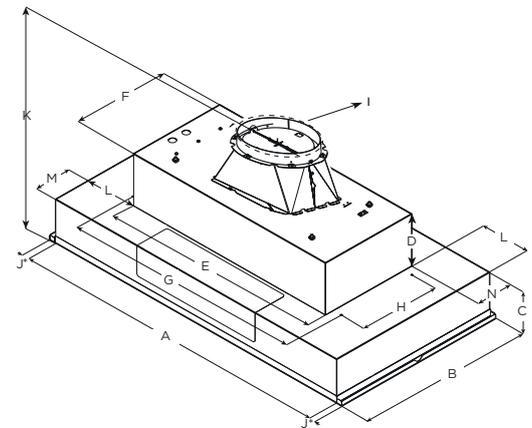

≥ 24" ≥ 30"

MOUNTING HEIGHT RANGE

	ESC628SS	ESC128SS	ESC134SS	ESC146SS
A	28½" (71.9 cm)	28½" (71.9 cm)	34½" (87.5 cm)	46½" (118 cm)
B	15¾" (40 cm)	15¾" (40 cm)	15¾" (40 cm)	15¾" (40 cm)
C	5" (13.8 cm)			
D	6½" (16.4 cm)			
E	22" (56 cm)	22" (56 cm)	27⅞" (70 cm)	27⅞" (70 cm)
F	12⅞" (31.6 cm)			
G	24⅞" (61.8 cm)	24⅞" (61.8 cm)	29⅞" (75.7 cm)	29⅞" (75.7 cm)
H	10⅞" (25.7 cm)			
I	10" (25.4 cm)			
J*	¾" (1.9 cm)			
K	17 ⅞" (43.4 cm)			
L	3 ⅞" (7.9 cm)	3 ⅞" (7.9 cm)	3 ⅞" (8.75 cm)	9 ⅞" (23.8 cm)
M	2 ⅞" (6.66 cm)			
N	⅞" (1.83 cm)			

*The spacers are optional depending on the width of the cabinet opening.

Width:	28" Unit	34" Unit	46" Unit
Model:	ESC628SS ESC128SS	ESC134SS	ESC146SS
Dimensions:	28 1/2"W x 15 5/8 "D x 11 15/16"H	34 1/2"W x 15 5/8 "D x 11 15/16"H	46 1/2"W x 15 5/8 "D x 11 15/16"H
Blower Type (Internal):**	600 CFM (4-speed) 1200 CFM (4-speed)	1200 CFM (4-speed)	1200 CFM (4-speed)
Noise (sones):**	7.0 Sones 8.5 Sones	8.5 Sones	8.5 Sones
Finish:	Stainless Steel		
Controls:	Fully retractable rotating knobs with blue backlighting		
Illumination:	2 LED, 7.5 W 3000 Kelvin, 540 lumen		4 LED, 7.5 W 3000 Kelvin, 540 lumen
Grease Filter:	Dishwasher-Safe, Professional Stainless Steel Baffle Filters 2 for 28",34" & 3 for 46"		
Duct Transition:	6" Round (600 CFM) / 8" Round (1200 CFM) with BackDraft Damper (top only)		
Installation Type:	Ducted Only		
Electrical:	120V - 60 Hz, 490 W	120V - 60 Hz, 913 W	
KITS:	External Blower Kit: KITO153054 (1200 CFM blower, 8" or 10" compatible) Inline Blower Kit: KITO154387 (1200 CFM blower, 8" or 10" compatible) Inline Blower Shell Kit: KITO179549 (for use with 1200 CFM blowers only) External Blower Shell Kit: KITO179547 (for use with 1200 CFM blowers only) Electronic CFM Reduction Bypass Kit: KITO185752 (for 600 CFM Blower) ,KIT0185099 (for 1200 CFM Blower) Transition Reducer Kit: KITO185271 (10" round down to 8" round)		
WARRANTY:***	Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com.		

PLUS FEATURES



HUSH SYSTEM - An exclusive sound deadening technology that effectively reduces sound levels by over 35%.



PROFESSIONAL PERFORMANCE - Special features and high performances for models with aspiration capacity between 600 and 1200 CFM's.



SEAMLESS CRAFTSMANSHIP - Heavy gauge stainless steel "Seamless" construction that delivers refined elegance.



STAINLESS STEEL BAFFLE FILTERS WITH GREASE COLLECTORS - Designed for high airflow cooking, the "S" shape design traps high volumes of grease.



HEAT GUARD - Senses extreme temperatures (>158 °F) and automatically adjusts the blower speed to HIGH.



Model	Certified Ratings	High Speed	Working Speed	Duct Size
ESC146SS ESC134SS ESC128SS	CFM Sones	860 12.5	320 2	10" (Vertical) 10" (Vertical)
ESC628SS	CFM Sones	500 9.5	180 2	10" (Vertical) 10" (Vertical)

* The product images shown are for illustration purposes only and may not be an exact representation of the product.

** Blower performance indicates the performance of the blower by itself. Performance claims are not AHAM certified but were established in accordance with HVI Standardized test procedure. For Certified Ratings, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

*** For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.