

FISHER & PAYKEL

PRELIMINARY SPECIFICATION GUIDE

WALL RANGEHOOD



OVERVIEW

Designed to complete the Contemporary kitchen, these wall box chimney rangehoods are made from quality stainless steel and sleek black glass. With four fan speeds. Powerful extraction quickly removes odours and steam. Enjoy seamless operation with Wi-Fi enabled remote control.

MODELS

Wall Rangehood, 24", Box Chimney
HC24DCXB4

Wall Rangehood, 30", Box Chimney
HC30DCXB4

Wall Rangehood, 36", Box Chimney
HC36DCXB4

SERIES & STYLE

Series 7
Contemporary Style

FEATURES

- ① Sleek black glass finish with stainless steel frame
- ② Wi-Fi enabled for remote control and notifications through the SmartHQ™ app
- ③ Edge-to-edge extraction
- ④ Bicolour LEDs 3K and 4K
- ⑤ Intuitive touch controls
- ⑥ Four fan speeds
- ⑦ Auto off timer function
- ⑧ Dishwasher-safe anti-drop aluminium filters
- ⑨ 6 inch diameter duct
- ⑩ Recirculation options available

ACCESSORIES

- ④ Chimney Extension
- ⑤ Recirculating Diverter
- ⑥ Recirculation Carbon Filter
- ⑦ Aluminium Filter

FISHER & PAYKEL


PRELIMINARY SPECIFICATION GUIDE

WALL RANGEHOOD, 24"

SPECIFICATIONS


Model No.	HC24DCXB4
Dimensions	H 40 3/4" - 23 7/16" x W 23 9/16" x D 19 11/16"
Minimum distance above cooktops	Consult the cooktop installation guide for details of the required installation height of the rangehood
Electrical	
Supply	120V - 60Hz
Outlet	3 pin plug
Light source	
Type	9-Watt LED lightstrip

PRODUCT DIMENSIONS

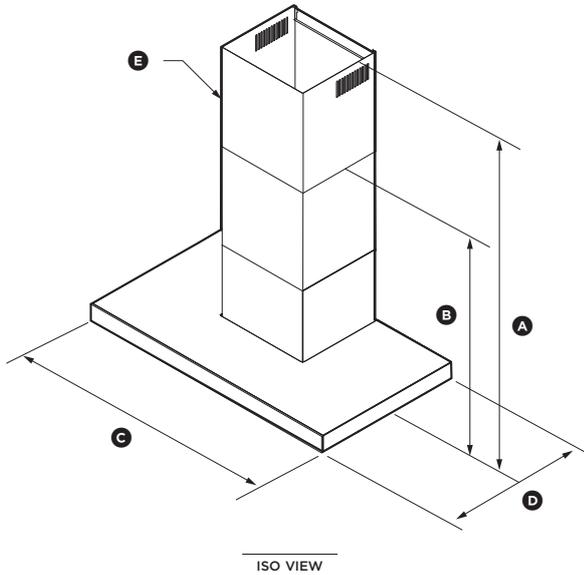

		inch
(A)	Maximum overall height of rangehood	40 3/4
(B)	Minimum overall height of rangehood	23 7/16
(C)	Overall width of rangehood	23 9/16
(D)	Overall depth of rangehood	19 11/16
(E)	Diameter of ducting outlet	6

ATTACHMENT DIMENSIONS

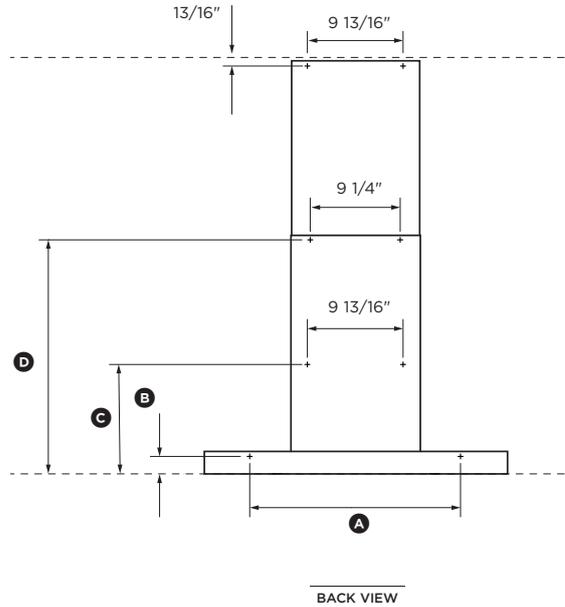

		inch
(A)	Lower rangehood attachment point width	16 9/16
(B)	Lower rangehood attachment point height	1 7/16
(C)	Upper rangehood attachment point height	11 1/4
(D)	Chimney bracket attachment point height	22

FISHER & PAYKEL


PRELIMINARY SPECIFICATION GUIDE

WALL RANGEHOOD, 30"


SPECIFICATIONS

Model No.	HC30DCXB4
Dimensions	H 40 3/4" - 23 7/16" x W 29 1/2" x D 19 11/16"
Minimum distance above cooktops	Consult the cooktop installation guide for details of the required installation height of the rangehood
Electrical	
Supply	120V - 60Hz
Outlet	3 pin plug
Light source	
Type	9-Watt LED lightstrip

PRODUCT DIMENSIONS

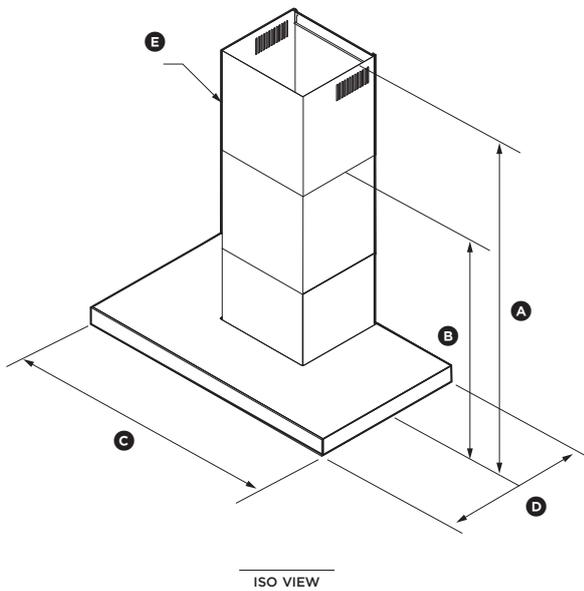

ATTACHMENT DIMENSIONS

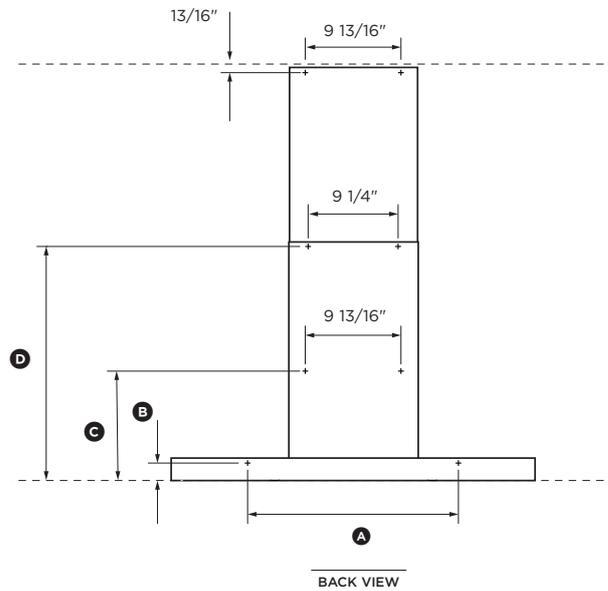

		inch
(A)	Maximum overall height of rangehood	40 3/4
(B)	Minimum overall height of rangehood	23 7/16
(C)	Overall width of rangehood	29 1/2
(D)	Overall depth of rangehood	19 11/16
(E)	Diameter of ducting outlet	6

		inch
(A)	Lower rangehood attachment point width	16 9/16
(B)	Lower rangehood attachment point height	1 7/16
(C)	Upper rangehood attachment point height	11 1/4
(D)	Chimney bracket attachment point height	22

FISHER & PAYKEL


PRELIMINARY SPECIFICATION GUIDE

WALL RANGEHOOD, 36"

SPECIFICATIONS


Model No.	HC36DCXB4
Dimensions	H 40 3/4" - 23 7/16" x W 35 3/8" x D 19 11/16"
Minimum distance above cooktops	Consult the cooktop installation guide for details of the required installation height of the rangehood
Electrical	
Supply	120V - 60Hz
Outlet	3 pin plug
Light source	
Type	9-Watt LED lightstrip

PRODUCT DIMENSIONS

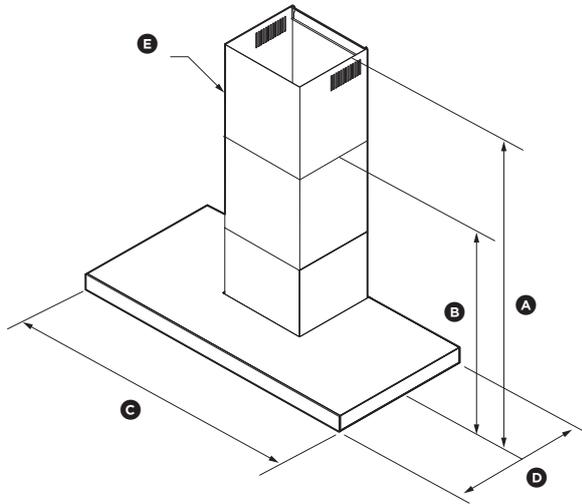

ISO VIEW

ATTACHMENT DIMENSIONS

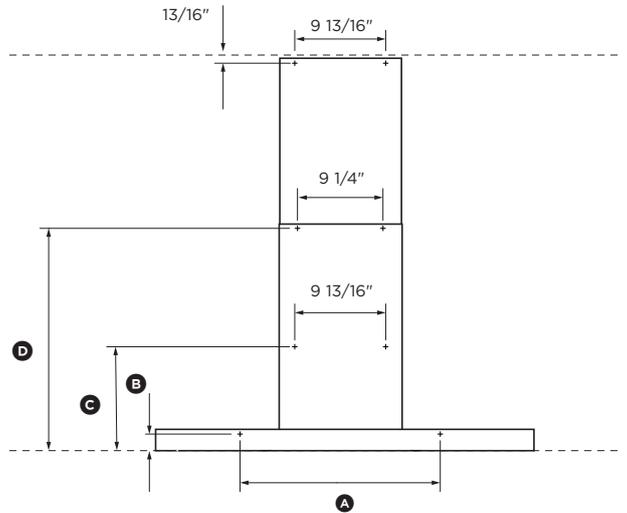

BACK VIEW

		inch
(A)	Maximum overall height of rangehood	40 3/4
(B)	Minimum overall height of rangehood	23 7/16
(C)	Overall width of rangehood	35 3/8
(D)	Overall depth of rangehood	19 11/16
(E)	Diameter of ducting outlet	6

		inch
(A)	Lower rangehood attachment point width	22 13/16
(B)	Lower rangehood attachment point height	1 7/16
(C)	Upper rangehood attachment point height	11 1/4
(D)	Chimney bracket attachment point height	22