ME302WS 30-INCH DOUBLE BUILT-IN OVEN

MASTERPIECE® SERIES











Home Connect

FEATURES & BENEFITS

- Specially crafted gray glass on stainless steel for a luxurious look and finish
- Designed for flexibility—standard or flush installation into kitchen cabinets
- SoftClose® door ensures ultra smooth closing of the oven door
- Full Access® telescopic rack
- Fast 2-hour self clean mode
- Fast preheat (around 7 minutes)

ACCESSORIES (INCLUDED)

Upper Cavity: 1 Telescopic and 2 Standard Oven Racks, Meat Probe, Broil Pan; Lower Cavity: 1 Telescopic and 2 Standard Oven Racks

GENERAL PROPERTIES

Heating Modes - Upper Cavity

(13) Bake, Broil, Roast, Convection Bake, Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast

Heating Modes - Lower Cavity

Sabbath

(13) Bake, Broil, Roast, Convection Bake, Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast

Yes

Cleaning Type Upper Cavity Lower Cavity Self Clean Easy Clean, Self Clean Easy Clean Halogen Halogen Halogen Easy Clean Halogen Halogen Halogen Easy Clean Ea	Sabbath		ies	
Illumination Type	Cleaning Type			
Lower Cavity Halogen	Telescopic Rack(s)		2	
Home Connect® (Wi-Fi Enabled) OVEN PERFORMANCE Bake / Broil Element Upper Cavity Lower Cavity Lower Cavity 2,400 / 3,800 W 2,400 / 3,800 W Convection Element Upper Cavity Lower Cavity 2,000 W 2,000 W TECHNICAL DETAILS Watts 9,200 W Circuit Breaker 40 A Volts 240 / 208 V Frequency 60 Hz Power Cord Length 60" Plug Type Fixed Connection, No Plug Conduit 60" 4-Wire Energy Source Electric DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) Trim Overlaps (Top – Sides – Bottom) Required Cutout Size (HxWxD) – Standard Source Upper Cavity Lower Cavity 4.5 cu. ft. 4.5 cu. ft. Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight Net Weight Vand A 2,400 / 3,800 W 2,000 W 2	Illumination Type			
Bake / Broil Element Upper Cavity Lower Cavity 2,400 / 3,800 W 2,000 W	Interior Lights			
Bake / Broil Element Upper Cavity Lower Cavity 2,400 / 3,800 W 2,400 / 3,800 W 2,400 / 3,800 W Convection Element Upper Cavity 2,000 W 2,000 W TECHNICAL DETAILS Watts 9,200 W Circuit Breaker 40 A Volts 240 / 208 V Frequency 60 Hz Power Cord Length 60" Plug Type Fixed Connection, No Plug 60" 4-Wire Energy Source Electric DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) 52 1/16" x 29 3/4" x 24 1/2" Trim Overlaps (Top – Sides – Bottom) 3/8" to 2" – 9/16" – 0" Required Cutout Size (HxWxD) – Flush 52 3/16" x 30" x 24 1/2" Required Cutout Size (HxWxD) – Flush 52 3/16" x 30" x 24 1/2" Oven Cavity Size Upper Cavity 4.5 cu. ft. 4.5 cu. ft. 4.5 cu. ft. Overall Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight 323 lbs	Home Connect® (Wi-Fi Enabled)		Yes	
Convection Element Upper Cavity 2,400 / 3,800 W Convection Element Upper Cavity 2,000 W TECHNICAL DETAILS Watts 9,200 W Circuit Breaker 40 A Volts 240 / 208 V Frequency 60 Hz Power Cord Length 60" Plug Type Fixed Connection, No Plug Conduit 60" 4-Wire Energy Source Electric DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) 52 1/16" x 29 3/4" x 24 1/2" Trim Overlaps (Top – Sides – Bottom) 3/8" to 2" – 9/16" – 0" Required Cutout Size (HxWxD) – Standard 50" – 51 1/2" x 28 1/2" x 23 1/2" Required Cutout Size (HxWxD) – Flush 52 3/16" x 30" x 24 1/2" Oven Cavity Size Upper Cavity 4.5 cu. ft. Lower Cavity 4.5 cu. ft. Overall Oven Interior Dimensions (HxWxD) 17 3/4" x 24" x 17 7/8" Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight 323 lbs	OVEN PERFORMANCE			
TECHNICAL DETAILS Watts 9,200 W Circuit Breaker 40 A Volts 240 / 208 V Frequency 60 Hz Power Cord Length Fixed Connection, No Plug Conduit 60" 4-Wire Energy Source Electric DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) Trim Overlaps (Top – Sides – Bottom) Required Cutout Size (HxWxD) – Standard Required Cutout Size (HxWxD) – Flush Oven Cavity Size Upper Cavity Lower Cavity Lower Cavity Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight	Bake / Broil Element			
Watts 9,200 W Circuit Breaker 40 A Volts 240 / 208 V Frequency 60 Hz Power Cord Length 60" Plug Type Fixed Connection, No Plug Conduit 60" 4-Wire Energy Source Electric DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) 52 1/16" x 29 3/4" x 24 1/2" Trim Overlaps (Top - Sides - Bottom) 3/8" to 2" - 9/16" - 0" Required Cutout Size (HxWxD) - Standard 50" - 51 1/2" x 28 1/2" x 23 1/2" x 23 1/2" Required Cutout Size (HxWxD) - Flush 52 3/16" x 30" x 24 1/2" Oven Cavity Size Upper Cavity Lower Cavity 4.5 cu. ft. Overall Oven Interior Dimensions (HxWxD) 17 3/4" x 24" x 17 7/8" Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight 323 lbs	Convection Element			
Circuit Breaker Volts 240 / 208 V Frequency 60 Hz Power Cord Length 60" Plug Type Fixed Connection, No Plug Conduit 60" 4-Wire Energy Source Electric DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) Trim Overlaps (Top – Sides – Bottom) Required Cutout Size (HxWxD) – Standard 50" – 51 1/2" x 28 1/2" x 23 1/2" Required Cutout Size (HxWxD) – Flush Oven Cavity Size Upper Cavity Lower Cavity 4.5 cu. ft. 4.5 cu. ft. Overall Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight	TECHNICAL DETAILS			
Volts Prequency 60 Hz Power Cord Length 60" Plug Type Fixed Connection, No Plug Conduit 60" 4-Wire Energy Source Electric DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) Trim Overlaps (Top – Sides – Bottom) Required Cutout Size (HxWxD) – Standard Required Cutout Size (HxWxD) – Flush Oven Cavity Size Upper Cavity Lower Cavity 4.5 cu. ft. Overall Oven Interior Dimensions (HxWxD) Net Weight 13 1/2" x 21 5/8" x 16 1/4" Net Weight	Watts		9,200 W	
Frequency Power Cord Length 60 " Plug Type Fixed Connection, No Plug Conduit 60 " 4-Wire Energy Source Electric DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) Trim Overlaps (Top – Sides – Bottom) Required Cutout Size (HxWxD) – Standard So" – 51 1/2" x 28 1/2" Required Cutout Size (HxWxD) – Flush Oven Cavity Size Upper Cavity Lower Cavity 4.5 cu. ft. Overall Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight A0 " Hive Connection, No Plug 60 " Fixed Connection, No Plug 61 " Fixed Connection, No Plug 61 " Fixed Connection, No Plug 61 " Fixed Connection, No Plug	Circuit Breaker		40 A	
Power Cord Length Plug Type Fixed Connection, No Plug Conduit 60" 4-Wire Energy Source Electric DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) Trim Overlaps (Top – Sides – Bottom) Required Cutout Size (HxWxD) – Standard \$50"-51 1/2" x 28 1/2" x 23 1/2" Required Cutout Size (HxWxD) – Flush Oven Cavity Size Upper Cavity Lower Cavity 4.5 cu. ft. 4.5 cu. ft. 4.5 cu. ft. 4.5 cu. ft. 17 3/4" x 24" x 17 7/8" Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight	Volts		240 / 208 V	
Plug Type Conduit 60" 4-Wire Energy Source Electric DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) Trim Overlaps (Top – Sides – Bottom) Required Cutout Size (HxWxD) – Standard Required Cutout Size (HxWxD) – Flush Oven Cavity Size Upper Cavity Lower Cavity 4.5 cu. ft. Overall Oven Interior Dimensions (HxWxD) Usable Oven Interior Dimensions (HxWxD) Fixed Connection, No Plug Fixed Connection, No Plug 60" 4-Wire Electric 52 1/16" × 29 3/4" × 24 1/2" 50" – 51 1/2" × 28 1/2" × 23 1/2" 4.5 cu. ft. 4.5 cu. ft. 17 3/4" × 24" × 17 7/8" Usable Oven Interior Dimensions (HxWxD) 13 1/2" × 21 5/8" × 16 1/4" Net Weight	Frequency		60 Hz	
Conduit Energy Source Electric DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) Trim Overlaps (Top – Sides – Bottom) Required Cutout Size (HxWxD) – Standard Required Cutout Size (HxWxD) – Flush Oven Cavity Size Upper Cavity Lower Cavity Upper Cavity Lower Cavity Usable Oven Interior Dimensions (HxWxD) Net Weight 60" 4-Wire Electric 52 1/16" × 29 3/4" × 24 1/2" 50" – 51 1/2" × 28 1/2" × 23 1/2" 4.5 cu. ft. 4.5 cu. ft. 17 3/4" × 24" × 17 7/8" Usable Oven Interior Dimensions (HxWxD) 13 1/2" × 21 5/8" × 16 1/4" Net Weight	Power Cord Length		60"	
Energy Source DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) Trim Overlaps (Top – Sides – Bottom) Required Cutout Size (HxWxD) – Standard Required Cutout Size (HxWxD) – Flush Oven Cavity Size Upper Cavity Lower Cavity 4.5 cu. ft. 4.5 cu. ft. Overall Oven Interior Dimensions (HxWxD) Usable Oven Interior Dimensions (HxWxD) DIMENSION & WEIGHT 3/4" x 29 3/4" x 24 1/2" 50" – 51 1/2" x 28 1/2" x 23 1/2" 4.5 cu. ft. 4.5 cu. ft. 17 3/4" x 24" x 17 7/8" Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight	Plug Type		Fixed Connection, No Plug	
DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) 52 1/16" x 29 3/4" x 24 1/2" Trim Overlaps (Top – Sides – Bottom) 3/8" to 2" – 9/16" – 0" Required Cutout Size (HxWxD) – Standard x 23 1/2" 50" – 51 1/2" x 28 1/2" x 23 1/2" Required Cutout Size (HxWxD) – Flush 52 3/16" x 30" x 24 1/2" Oven Cavity Size Upper Cavity Lower Cavity 4.5 cu. ft. Overall Oven Interior Dimensions (HxWxD) 17 3/4" x 24" x 17 7/8" Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight 323 lbs	Conduit		60" 4-Wire	
Overall Appliance Dimensions (HxWxD) 52 1/16" x 29 3/4" x 24 1/2" Trim Overlaps (Top – Sides – Bottom) 3/8" to 2" – 9/16" – 0" Required Cutout Size (HxWxD) – Standard x 23 1/2" 50" – 51 1/2" x 28 1/2" x 23 1/2" Required Cutout Size (HxWxD) – Flush 52 3/16" x 30" x 24 1/2" Oven Cavity Size Upper Cavity Lower Cavity 4.5 cu. ft. 4.5 cu. ft. Lower Cavity 17 3/4" x 24" x 17 7/8" Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight 323 lbs	Energy Source		Electric	
Trim Overlaps (Top – Sides – Bottom) Required Cutout Size (HxWxD) – Standard Required Cutout Size (HxWxD) – Flush Oven Cavity Size Upper Cavity Lower Cavity 4.5 cu. ft. Overall Oven Interior Dimensions (HxWxD) Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight	DIMENSIONS & WEIGHT			
Required Cutout Size (HxWxD) – Standard 50" – 51 1/2" x 28 1/2" x 23 1/2" Required Cutout Size (HxWxD) – Flush 52 3/16" x 30" x 24 1/2" Oven Cavity Size Upper Cavity 4.5 cu. ft. 4.5 cu. ft. Lower Cavity 17 3/4" x 24" x 17 7/8" Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight 323 lbs	Overall Appliance Dimensions (HxWxD)		52 1 / 16 " x 29 3 / 4 " x 24 1 / 2 "	
x 23 1/2" Required Cutout Size (HxWxD) – Flush Oven Cavity Size Upper Cavity Lower Cavity 4.5 cu. ft. 4.5 cu. ft. Overall Oven Interior Dimensions (HxWxD) 17 3/4" x 24" x 17 7/8" Usable Oven Interior Dimensions (HxWxD) Net Weight 323 lbs	Trim Overlaps (Top – Sides – Bottom)		3/8" to 2" -9/16" - 0"	
Oven Cavity Size Upper Cavity Lower Cavity 4.5 cu. ft. 4.5 cu. ft. 4.5 cu. ft. 17 3/4" x 24" x 17 7/8" Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight 323 lbs	Required Cutout Size (HxWxD) – Standard			
Lower Cavity 4.5 cu. ft. Overall Oven Interior Dimensions (HxWxD) 17 3/4" x 24" x 17 7/8" Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight 323 lbs	Required Cutout Size (HxWxD) – Flush		52 3/₁₆ " x 30" x 24 1/₂ "	
Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4" Net Weight 323 lbs	Oven Cavity Size			
Net Weight 323 lbs	Overall Oven Interior Dimensions (HxWxD)		17 3/4 " × 24" × 17 7/8 "	
	Usable Oven Interior Dimensions (HxWxD)		13 1/2 " x 21 5/8 " x 16 1/4 "	
WARRANTY	Net Weight		323 lbs	
	WARRANTY			

Page 1 of 3 5 / 23

Limited Warranty Parts and Labor


2 Year


ME302WS 30-INCH DOUBLE BUILT-IN OVEN

MASTERPIECE® SERIES



30-INCH DOUBLE OVEN

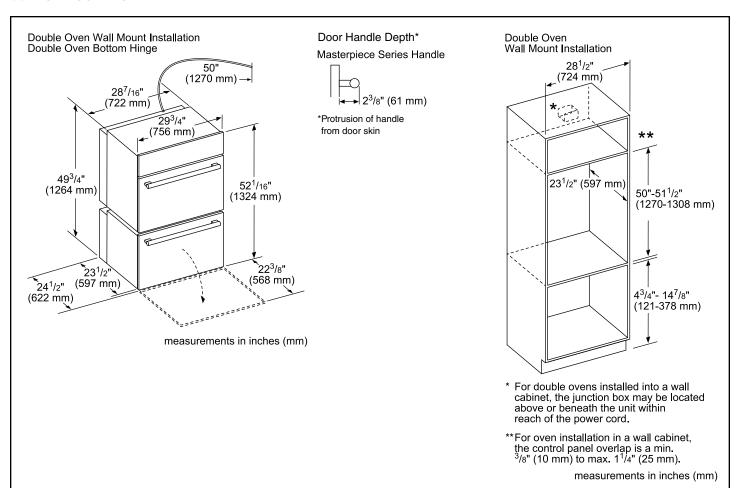

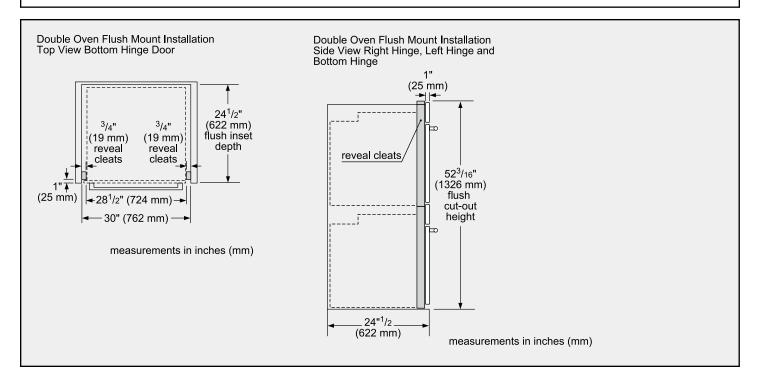


Page 2 of 3 5 / 23


ME302WS 30-INCH DOUBLE BUILT-IN OVEN

MASTERPIECE® SERIES



INSTALLATION DETAILS

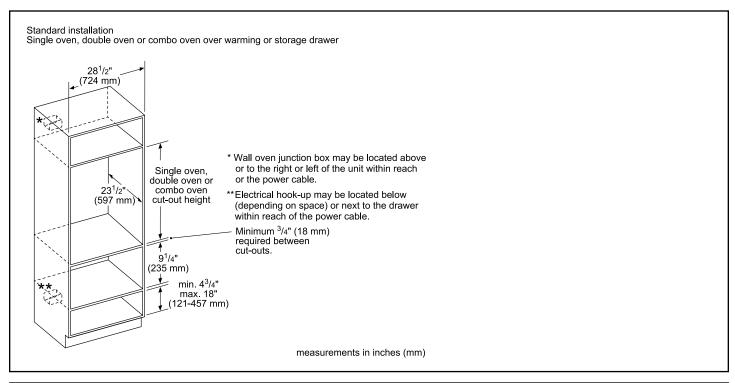

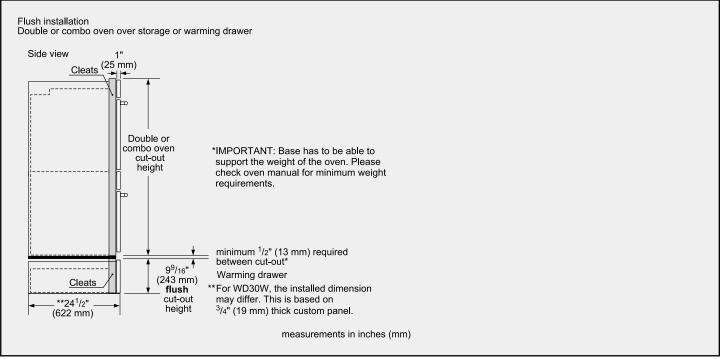

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

 $1\,800\,735\,4328 \mid USA\,THERMADOR.COM\mid CANADA\,THERMADOR.CA\mid @2023\,BSH\,HOME\,APPLIANCES\,CORPORATION.\,ALL\,RIGHTS\,RESERVED.$

Page 3 of 3 5 / 23