





SCB5790IM



Available Accessories:


- FreshAir activated charcoal filter
- Door opening limitation
- Side By Side kit for models with handles 80"
- Top Ventilation grill for Side by Side Installation

<div><div>Power Cooling</div><div>Light Tower</div><div>Fish &amp; Seafood Safe</div><div></div></div>	
Energy consumption (kWh / y)	-
Estimated Yearly Energy Cost in US \$	-
Sound rating dB(A)	33
Total capacity cu.ft. (l)	12.7 (360)
Refrigerator capacity cu.ft. (l)	5.6 (160)
BioFresh compartment cu.ft. (l)	3.4 (96)
Freezer capacity cu.ft. (l)	3.7 (104)
Electronic control	Touch & swipe display
Defrost type	Automatic
Interior light	LightTower
Number of shelves	3 + VarioSafe
Number of door racks	2 + VarioBox
Number of BioFresh drawers	2
Number of FrostSafe drawers	3
Refrigerator Temperature range °F (°C)	+36°F to +46°F (+3°C to +9°C)
Freezer Temperature range °F (°C)	+5°F to -15°F (-15°C to -26°C)
Internal Water Dispenser	No
Water filter	No
Ice maker	Fixed water connection
Ice cube output lbs. (kg.)	2.6 (1.2)
Ice cube stock lbs. (kg.)	11.9 (5.4)
Door hinges	Right, reversible
<b>Product dimensions</b>	79 5/16 / 23 1/2 / 26 9/16
in inch (H/W/D)	201.5 / 59.7 / 67.5
in cm (H/W/D)	
<b>Cut out dimensions</b>	80 / 24 / 24
in inch (H/W/D)	203.2 / 60.9 / 60.9
in cm (H/W/D)	374 (170)
Net weight lbs. (kg)	115/60
Voltage V/Hz	

\* Estimated energy cost will depend on utility rates and use. Estimated energy cost based on a national average electricity cost of 14 cents per KWh.

\*\* Noise output – according to EN 60704-3.

Product Dimensions

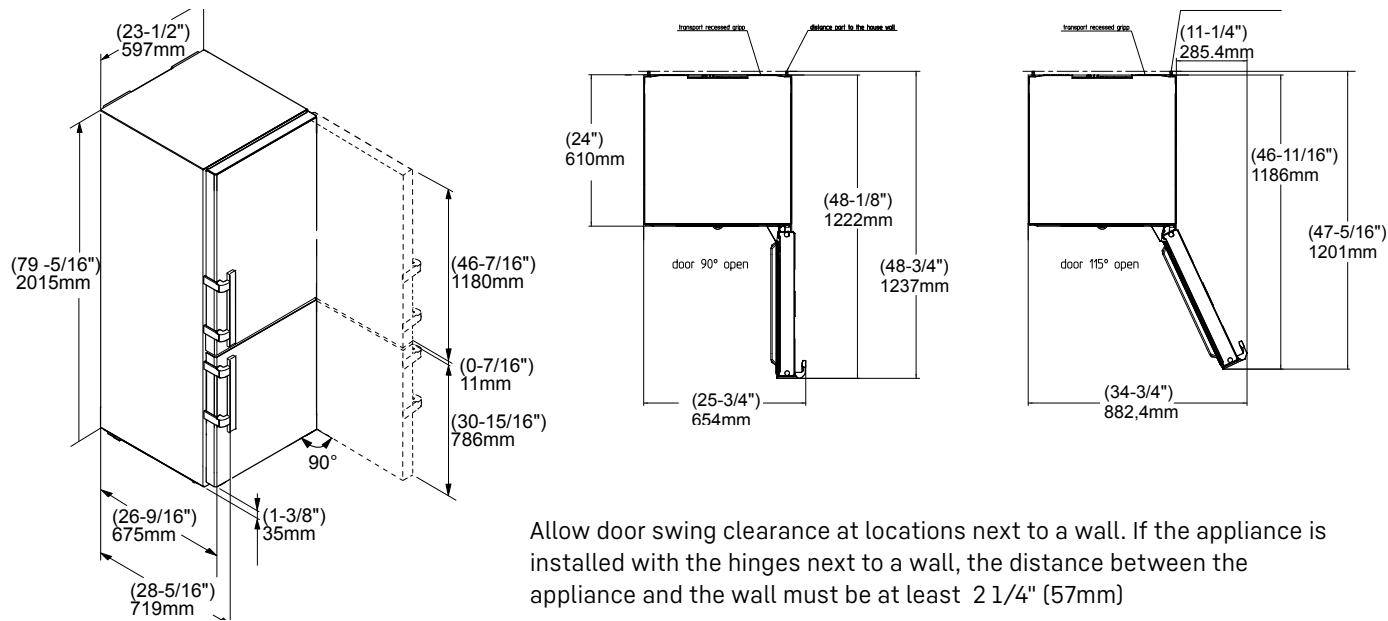


Allow door swing clearance at locations next to a wall. If the appliance is installed with the hinges next to a wall, the distance between the appliance and the wall must be at least 2 1/4" (57mm)

The refrigerator door must open to a minimum of 90° to allow the crispers to open and the shelves to be removed. There is no 90° door limiter available for this model.

Height can be increased by 3/8" (10mm) by turning the levelling feet at the front and the height adjustable rollers at the appliance rear.

Semi built-in look – Cutout Dimensions

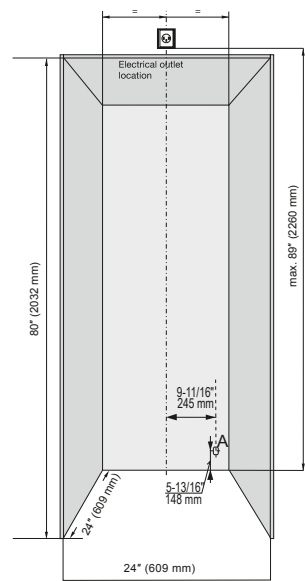

The appliances can be used freestanding or semi built-in. If semi built-in, consider the minimum cabinet opening dimensions specified on this image. For ventilation requirements, please follow instructions on section Ventilation Requirements, page 36.

The power cord exists the rear of the appliances (A) right side and has a length of 6.5 ft (2m). We suggest the electrical outlet not to be located behind the appliance, so it is easily accessible. This can be located on top of the niche like shown on the image or on the side.

Do not install the shut-off valve for the water supply behind the appliance, to allow access to shut off without having to pull out the appliance. The water line lead out position is according to below graphic (B).