



Color Variants

VP414611

Stainless steel

Width 15" (38 cm)

VP414611

Vario 400 series teppan yaki

Stainless steel

Width 15" (38 cm)

Hard chrome-plated surface for teppan cooking and use as griddle, grill, searer and warming plate. No pots or pans necessary.

Exact temperature control up to 480 °F, with warming and cleaning settings
Optimum heat distribution
Solid stainless steel control knobs
Precision crafted 1/8-inch stainless steel frame

For surface-mount installation with a visible edge or for flush installation
Can be perfectly combined with other Vario 400 series appliances

Cooking zones

Usable area W 31 x D 44 cm.

Operation

Two control knobs with illuminated ring, cooking position and output marking.
Electronic temperature control from 120 °C to 240 °C.

Features

Two zones, each 1500 W, can be operated together as a complete surface or each halve separately.
Keeping warm setting.
Cleaning setting.
Simple to clean surface.

Safety

Safety shut-off.
Pre-heat and residual heat indicator.

Planning notes

Depending on the type of installation — surface-/ or flush-mounted, with or without cover — the specific location of the control knob positions may vary.
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
The bearing capacity and stability, in the case of thin countertops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.
Additional instructions for flush mounting:
Flush installation is possible in countertops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the edges must be observed. For other materials, please consult with your countertop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the countertop cut-out.
If installing several appliances in individual cut-outs allow for a division bar of inimum 1 3⁄32" (50 mm) between the individual cut-outs.
A minimum lateral clearance of at least 40 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 12 kg.

Rating

Total rating: Connected load: 3000 W

Product Features

Product name / series name

Vario/Domino Teppan Yaki

Construction type

Built-in

Energy source

Electric

Oven Control

Electronic

Grill grating material

Required cutout size (HxWxD) (mm)

118 x 360 x 490

Width of the product (mm)

380

Overall appliance dimensions (HxWxD) (mm)

118 x 380 x 520

Product packaging dimensions

(HxWxD) (mm)

400 x 460 x 600

Net weight (kg)

12.278

Gross weight (kg)

16.1

Residual heat indicator

Separate

Location of control panel

Cooktop front

Basic surface material

Color of surface

Stainless steel, Stainless steel

Color of frame

Stainless steel

Approval certificates

Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE

Power cord length (cm)

150

Consumption and connection features

Watts (W)

3000

Gas connection rating (W)

Current (A)

16

Volts (V)

208-240


Frequency (Hz)

60

2020-09-13

Page 1


Plan for a 59 1/16" connecting cable without plug (hardwire required).



A: $\frac{1}{8}$ " (3.5^{0.5})


Measurements in inches (mm)

Installation with appliance cover, surface mounting

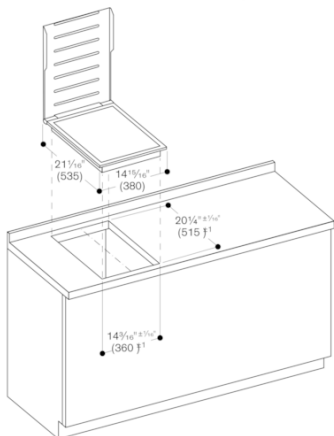


Measurements in inches (mm)

Installation with appliance cover, flush mounting

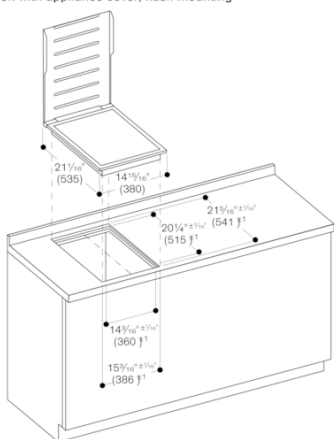


Measurements in inches (mm)

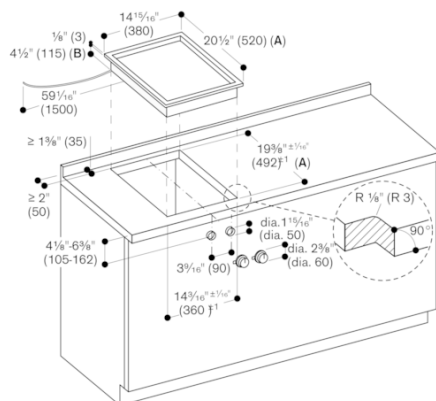

- A: When installing with appliance cover consider the deeper cut-out (observe separate planning notes)
B: 5 1/8" (130 mm) in the area of the cable clamp (left, on the rear side)


Measurements in inches (mm)

Control knob installation, flush installation

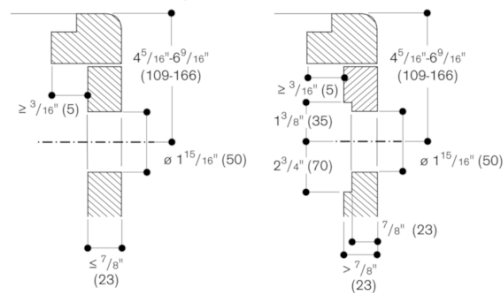

measurements in inches (mm)

Control knob installation, surface mounting

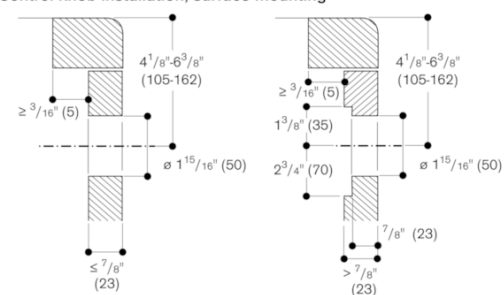

measurements in inches (mm)