



Color Variants

VR414610

Stainless steel

Width 15"

Included accessories

- 1 x cast pan, half size.
- 1 x grease drip tray.
- 2 x cast iron grill.
- 1 x lava stones.
- 1 x cleaning brush.

Optional accessories

LV030000

Lava stones for refilling

VA461001

Cast pan, enamelled, full size

Installation Accessories

VA420000

Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA420010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting

VA440010

Stainless steel appliance cover with mounting strip

VR414610

Vario electric grill 400 series

Stainless steel

Width 15"

2 separately controlled zones
Cast pan, half size, for simultaneous frying and grilling on two separate surfaces
Open cast grill, lava stones
Solid stainless steel control knob
Precision crafted 3 mm stainless steel
For surface mounting with a visible edge or for flush mounting
Can be combined perfectly with other Vario appliances of the 400 series

Handling

Control knobs with illuminated ring, cooking zone and output level markings.
Electronic control in 12 output levels.

Features

Cooktop, lava stone trough and grease collecting insert from stainless steel.
2 independently controlled grilling elements (1500 W).
Two-part cast grill.

Safety

Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.
If installing with the appliance cover VA 440 or filler strip VA 450 take into account the additional space required for the depth.
If combining several appliances with at least one appliance cover, the filler strip VA 450 is required to compensate for the depth of the appliance without the appliance cover.
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
In the cut-out, the installation system requires the side edge to be at least 10 mm for surface mounting and at least 13 mm for flush mounting. Ensure a continuous cut surface of 90°.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting:
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
Built-in control panel to be integrated in the bottom cabinet at drawer level.
Panel thickness 5/8" - 1".

Characteristics

Product name/family

Vario/Domino barbecue grill

Built-in / Free-standing

Built-in

Energy input

Electric

Type of control

Electronic

Grill grating material

Cast iron

Required niche size for installation (HxWxD)

95 x 360 x 490

Width of the appliance

380

Dimensions

95 x 380 x 520

Dimensions of the packed product (HxWxD) (mm)

340 x 440 x 585

Net weight (kg)

27.744

Gross weight (kg)

29.8

Residual heat indicator

Separate

Location of control panel

Hob front

Basic surface material

Cast iron

Color of surface

Stainless steel, Stainless steel

Color of frame

Stainless steel

Approval certificates

CSA, ETL, UL

Length electrical supply cord (cm)

180

Connection rating (W)

3000

Gas connection rating (W)

Current (A)

16

Voltage (V)

208-240

Frequency (Hz)

60

Consumption and connection features

2021-02-24

Page 1


The drawing "Installation of the control knob" must be observed if the panel is more than 1" thick (there must be a recess at the rear).
A minimum lateral clearance of at least 3 1/2" from adjacent heat-sensitive furniture or from the wall must be observed.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 28 kg.

Connection


Total connected load 3.0 KW.
Total Amps: 16 A.
Connecting cable 1.8 m without plug.



When installing with appliance cover or spacer batten, pay attention to the deeper cut-out and the front and rear groove width.

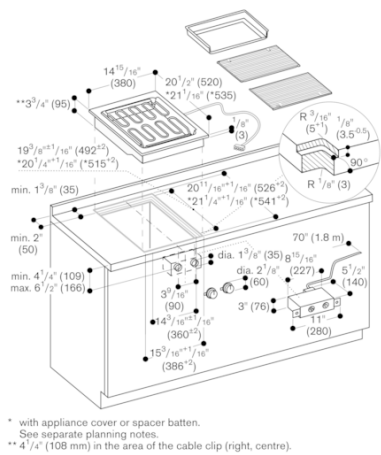

Installation with appliance cover/spacer batten;
surface installation

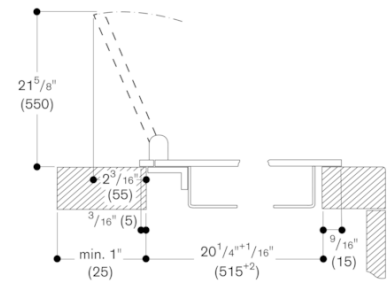

Installation with appliance cover/spacer batten;
flush installation

