

ACT™


	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
Min. - Max. CFM	200 - 600	200 - 390	200 - 290
Min. - Max. Sones	1 - 6	*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.	




Stainless Steel




Black Stainless Steel

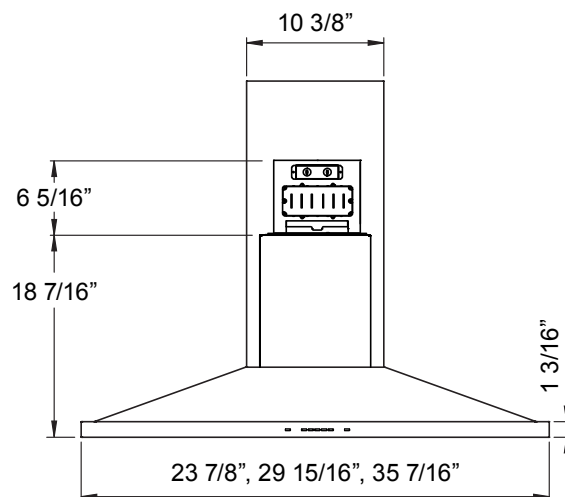

FRONT

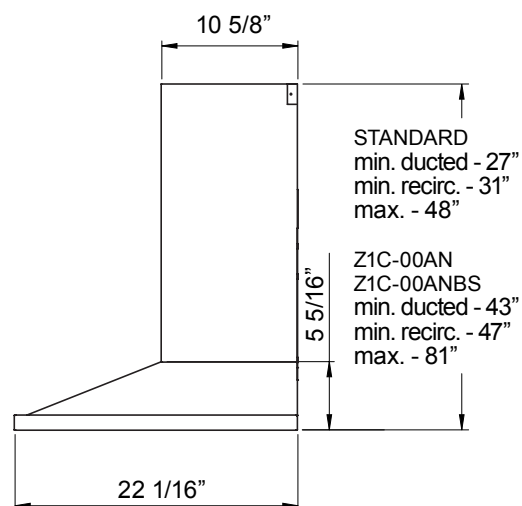

SIDE

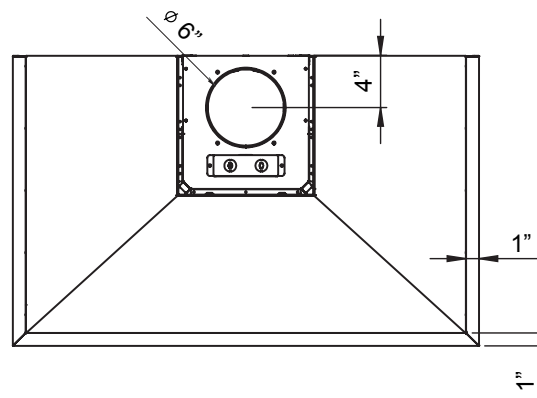

TOP

MODEL

Black Stainless Steel

Stainless Steel

Size

ZAN-E24DS

24"

ZAN-E30DBS

ZAN-E30DS

30"

ZAN-M90DBS

ZAN-M90DS

36"

BLOWER PERFORMANCE

Blower CFM (Min. - Max.)

200 - 600

200 - 600

200 - 600

Sones (Min. - Max.)

1 - 6

1 - 6

1 - 6

ACT 390 CFM (Min. - Max.)

200 - 390

200 - 390

200 - 390

ACT 290 CFM (Min. - Max.)

200 - 290

200 - 290

200 - 290

FEATURES

ACT™ Technology

390, 290

390, 290

390, 290

Controls

ICON Touch®

ICON Touch®

ICON Touch®

Speed Levels

5*

5*

5*

Auto Delay-Off

Yes

Yes

Yes

Lighting

LumiLight LED, 6W x1

LumiLight LED, 6W x2

LumiLight LED, 6W x2

Dual-Level Lighting

Yes

Yes

Yes

Filters

Aluminum Mesh x1

Aluminum Mesh x2

Aluminum Mesh x2

Recirculating Option

Yes

Yes

Yes

Duct Cover Extension Option

Yes, Up to 12' Ceiling

Yes, Up to 12' Ceiling

Yes, Up to 12' Ceiling

ADA Compliant

Yes, w/ remote accessory

Yes, w/ remote accessory

Yes, w/ remote accessory

DUCT SPECIFICATIONS

Vertical Internal Blower

6" Round

6" Round

6" Round

Horizontal Internal Blower

NA

NA

NA

AC POWER

120V, 60Hz at Max. 4A

120V, 60Hz at Max. 4A

120V, 60Hz at Max. 4A

OPTIONAL ACCESSORIES

Wireless Remote Control Kit

RC-0002

RC-0002

RC-0002

Recirculating Kit

ZRC-01AN

ZRC-01AN

ZRC-01AN

Duct Cover Extension

Z1C-00AN (SS)

Z1C-00ANBS (Black SS)
Z1C-00AN (SS)Z1C-00ANBS (Black SS)
Z1C-00AN (SS)

Stainless Steel Telescopic Backsplash

NA

AK1710

NA

Make-Up Air Kit

MUA006A

MUA006A

MUA006A

Hybrid Baffle Filter Kit (2 filters)

Z0F-B002

Z0F-B002

Z0F-B002

MOUNTING HEIGHT RANGE**

26" - 34"

26" - 34"

26" - 34"

WARRANTY

3 years parts, 1 year labor

3 years parts, 1 year labor

3 years parts, 1 year labor

CEILING HEIGHT		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'
STANDARD DUCT COVER	Ducted Mounting Height***	26" - 33"	26" - 34"	26" - 34"	29.5" - 34"	NA	NA	NA	NA
	Recirc Mounting Height***	26" - 29"	26" - 34"	26" - 34"	29.5" - 34"	NA	NA	NA	NA
DUCT COVER EXTENSION	Ducted Mounting Height***	NA	NA	26" - 29"	26" - 34"	26" - 34"	26" - 34"	26" - 34"	27" - 34"
	Recirc Mounting Height***	NA	NA	NA	26" - 31"	26" - 34"	26" - 34"	26" - 34"	27" - 34"

*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 4 speeds and ACT 290 CFM = 3 speeds.

**Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

ACT™ Airflow Control Technology™ (ACT™)

is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

MAY22.0101

