# 36" Pull-Out Hood

500 Series - Stainless Steel HUI56551UC





**HUI56551UC** Stainless Steel

This sleek, 36" integrated pull-out hood allows you to close the hood when not in use, providing a flush-look with cabinetry.

tures a		

Front stainless steel panel is replaceable with custom cabinetry panel.

500 CFM integrated blower included & recirculation kit available for sale.

3 speed slider control & 2 halogen lights.

Dishwasher safe aluminum mesh filters.

Absorbs odors with charcoal replacement filters (available for sale).

General Properties				
Operating mode	Convertible: ducted / recirculating			
Maximum CFM	500 CFM			
Number of speed settings	3-stage			
Motor location	Integrated motor in hood body			
Number of lights	2			
Bulb type	Halogen (20 W)			
Light lumens	320			
Light color	3000 K			
Total power of the lamps	40 W			
Damper included	Yes			
Grease filter material	Aluminum			
Grease filter type	Multilayer cassette			
Technical Details				
Volts	120 V			
Frequency	60 Hz			
Plug type	No plug			
Power cord length	50"			



Dimensions & Weight	
Overall appliance dimensions (width of canopy included) (HxWxD)	11 <sup>9</sup> / <sub>16</sub> " x 35 <sup>7</sup> / <sub>8</sub> " x 11 <sup>13</sup> / <sub>16</sub> "
Minimum distance above cooktop / range cooking surface	Min. 24" electric / 29 <b>1/2</b> " gas
Diameter of air duct top	6"
Diameter of air duct back	6"
Net weight	32.5 lbs

#### **Accessories - Optional**



**HUIF06UC** Recirculation Kit



HUIRED56UC CFM Reducer Kit; reduces CFM to under 300

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

# 36" Pull-Out Hood


500 Series - Stainless Steel HUI56551UC





### **AHAM Performance Values**

Exhaust	Duct Size	Pressure (in. H2O)		Power (W)		CFM		Sones	
		High Speed	Working Speed	High Speed	Working Speed	High Speed	Working Speed	High Speed	Working Speed
Vertical	6"	0.1	0.025	314	182	470	200	9.5	2.5
Vertical	6"	0.1	0.025	304	176	470	200	9.5	2.5

#### **Installation Details**

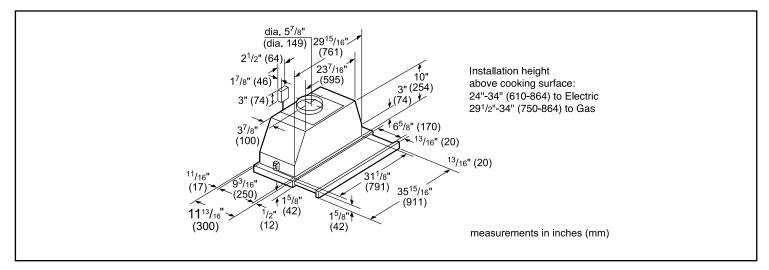

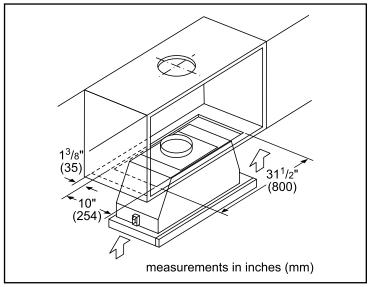

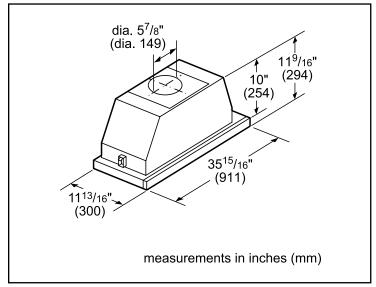

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.